


NEMA Non-Reversing Starters

Product Overview/Cat. No. Explanation



Bulletin 509, Size 1 with Eutectic Alloy Overload Relay
Open Type without Enclosure

Bulletin 509 Open Type Full Voltage Starter

- Feed-through construction
- Starter can be field wired for single- or three-phase applications

NEMA sizes 0...4

- Available as components or as a modular kit for faster delivery
- Product selection can be done via two options:
 - Ordering a complete kit
 - Ordering individual components
- Starter includes a 120V AC coil and (1) N.O. auxiliary contact, as standard

NEMA sizes 00, 5...9

- Available as factory assembled

NEMA sizes 00...9 (Enclosed)

- Available as factory assembled

Table of Contents

Product Selection 1-46
 Modifications 1-106
 Accessories 1-111
 Specifications 1-126
 Approximate Dimensions 1-133
 Heater Element Selection 1-167

Standards Compliance

NEMA/EEMAC ICS 2
 UL 508
 CSA C22.2 No.14
 ABS 4/5.115 — American Bureau of Shipping
 UCSG 46 CFR 111.70
 EN/IEC 60947-4-1
 CE Marked

Certifications

CSA Certified (LR1234)
 UL Listed (File No. E3125, Guide No. NLDX)
 Hazardous Location: UL Listed (File No. E10314), CSA Certified (LR 11924)

Catalog Number Explanation

Example Cat. No.

509 – B O D – A2E – 17

a b c d e f

a

Bulletin No.	
Bulletin No.	Description
509	Top-wired contactor
509DC	Top-wired contactor (DC voltage)

b

NEMA Size	
Code	Description
T	00
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9

c

NEMA Enclosure Type	
Code	Type
A	Type 1
C	Type 4X (stainless steel)
H	Type 3R, 7 & 9 bolted
J	Type 3R/4/12
O	No enclosure

d

Nominal Coil Voltage		
Code	Voltage	Frequency
A	220V 240V	50 Hz 60 Hz
B	440V 480V	50 Hz 60 Hz
C	550V 600V	50 Hz 60 Hz
D	110V 120V	50 Hz 60 Hz
F	277V	60 Hz
H	200...208V	60 Hz
I	415V	50 Hz
J	24V	50/60 Hz
N	380V	50 Hz
VL	24V DC	—
VG	125...250V DC	—

e

Eutectic Overload Relay	
Code	Description
blank	Eutectic Alloy

E1 Plus Solid-State Overload Relay		
Code	NEMA Size	Full Load Current Adjustment Range [A]
3-Phase		
A2C	0,1	0.2...1.0
A2E	0,1	1.0...5.0
A2F	0,1	3.2...16
A2G	0,1,2	5.4...27
A2J	1,2,3	9...45
A2L	3	18...90
A2M	4	30...150
A2N	5	60...300
A2R	6	120...600
A2T	7	256...810
A2U	8	384...1215
A2V	9	800...2250
1-Phase		
S2E	0,1	1.0...5.0
S2F	0,1	3.2...16
S2G	0,1,2	5.4...27
S2J	1,2,3	9...45
S2L	3	18...90

f

Factory Installed Modifications/Options	
For detailed information, see Modifications on page 1-106.	

or

Options	
Code	Description
9	(1) N.O. Auxiliary Contact for use on Eutectic Overload Relay
9A	(1) N.C. Auxiliary Contact for use on Eutectic Overload Relay
17	Surge Suppressor for 120 or 240V AC Coil
90	(1) N.O. Auxiliary Contact for use on Contactor*
91	(1) N.C. Auxiliary Contact for use on Contactor*

* Up to (6) combinations of auxiliary contacts can be selected. Example: Code 90011 indicates (2) N.O. and (2) N.C. contacts.

Heater Elements — Starters with eutectic alloy overload relays require 3 heater elements. See page 1-167 for heater element selection tables.


Note: All enclosed non-combination starters are supplied with external reset as standard, except for starters with E3 overload relay.

www.ab.com/catalogs Preferred availability cat. nos. are **bold**.

NEMA Non-Reversing Starters

Product Selection — Factory Assembled

Product Selection as Factory Assembled



Bulletin 509, Size 3 with Eutectic Alloy Overload Relay, Open Type without Enclosure



Bulletin 509, Size 5 with Solid-State Overload Relay, Open Type without Enclosure



Bulletin 509, Size 0 Stainless Steel Enclosure

Heater Elements — Starters with eutectic alloy overload relay require 3 heater elements. See page 1-167 for heater element selection tables.

3-Phase • 600V AC Maximum • 60 Hz • With 3-Pole Overload Protection									
NEMA Size	Continuous Ampere Rating [A]	Maximum Horsepower Rating Full Load Current Must Not Exceed "Continuous Ampere Rating"				Open Type Without Enclosure	Type 1 General Purpose Enclosure Surface Mounting	Type 3R/4/12 Rainproof, Dusttight Industrial Use Enclosure	Type 4/4X Watertight Corrosion-Resistant Enclosures Stainless Steel
		Motor Voltage							
		200V	230V	50 Hz 380... 415V	460... 575V				
						Cat. No.	Cat. No.	Cat. No.	Cat. No.*
00	9	1.5	1.5	2	2	509-TO	509-TA	Use Size 0 starter	
0	18	3	3	5	5	♣	509-AA	509-AJ	509-AC
1	27	7.5	7.5	10	10	♣	509-BA	509-BJ	509-BC
2	45	10	15	25	25	♣	509-CA	509-CJ	509-CC
3	90	25	30	50	50	♣	509-DA	509-DJ	509-DC
4	135	40	50	75	100	♣	509-EA	509-EJ	509-EC
5	270	75	100	150	200	509-FO	509-FA	509-FJ	509-FC
6‡	540	150	200	300	400	509-GO	§ 509-GA	§ 509-GJ	§ 509-GC
7‡	810	—	300	600	600	509-HO	509-HA	509-HJ	—
8‡	1215	—	450	900	900	509-JO	509-JA	509-JJ	—
9	2250	—	800	1600	1600	509-KO	509-KA	509-KJ	—

* Sizes 6...8 are painted enclosures.

‡ Does not include line and load lugs, see page 1-118 for kits.

§ Price includes control current transformer.

♣ See page 1-46 for NEMA size 0...4 open type starters.

⊗ Coil Voltage Code

The cat. no. as listed is incomplete. Select a coil voltage code from the table below to complete the cat. no. Example: **Cat. No. 509-BA** becomes **Cat. No. 509-BAD**. For other voltages, please consult your local Rockwell Automation sales office or Allen-Bradley distributor.

[M]		24	110	120	125	200-208	220	240	250	277	380	415	440	480	550	600
Common Control+	AC, 50 Hz	—	—	—	—	—	A	—	—	—	N	I	B	—	C	—
	AC, 60 Hz	—	—	—	—	H	—	A	—	—	—	—	—	—	—	—
Transformer Control	AC, 60 Hz	—	—	—	—	H	—	A	—	—	—	—	—	B	—	C
Separate Control (without transformer)	AC, 50 Hz	K	D	—	—	—	—	—	—	—	—	—	—	—	—	—
	AC, 60 Hz	J	—	D	—	—	—	—	—	F	—	—	—	—	—	—
	DC>	VL	—	—	VG	—	—	—	VG	—	—	—	—	—	—	—

+ When selecting a factory-installed control circuit transformer (see Modifications on page 1-106), use the common control coil voltage code to denote the transformer primary voltage. The starter coil and transformer secondary voltage will both be 120V by default. Example: **Cat. No. 509-BAB-6P** will have a transformer with a 480V primary/120V secondary voltage and a 120V starter coil. If a starter coil voltage other than 120V is desired, a second coil voltage code must be added to denote the coil/transformer secondary voltage. Example: **Cat. No. 509-BABJ-6P** will have a transformer with a 480V primary/24V secondary and a 24V starter coil.

> DC voltage code is only available for NEMA sizes 0...3. When ordering a DC voltage code (VL or VG), add "DC" to the catalog number. Example: **Cat. No. 509DC-BOVL**.


⊗ Overload Relay Code

Use to order solid-state overload relay. Do not use when ordering eutectic alloy overload relay. The cat. no. as listed is incomplete. Select an overload relay code from page 1-164 to complete the cat. no. Example: **Cat. No. 509-BAD** becomes **Cat. No. 509-BAD-A2E**.



Approximate dimensions are shown in inches (millimeters). Dimensions are not intended to be used for manufacturing purposes.

Type 3R (Enclosure Code "N") Rainproof Narrow Enclosures — for Bulletins 1232 and 1233

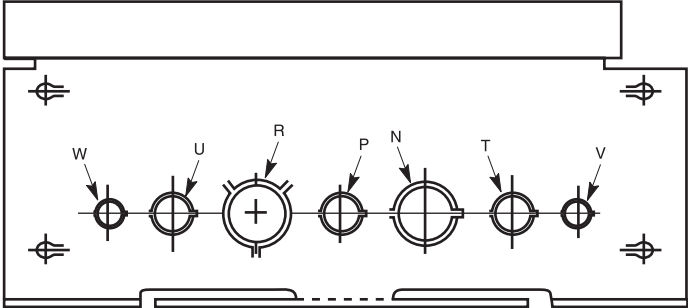

Bulletin No.	NEMA Size	Approximate Dimensions in Inches (Millimeters)							
		N		P		R		T	
		Inside	Outside	Inside	Outside	Inside	Outside	Inside	Outside
1232 1233	1	1-3/8 (35)	1-23/32 (44)	7/8 (22)	1-1/8 (29)	1-23/32 (44)	1-31/32 (50)	7/8 (22)	1-1/8 (29)
	2	1 in. Hub	1-1/4 in. Hub	1/2 in. Hub	3/4 in. Hub	1-1/4 in. Hub	1-1/2 in. Hub	1/2 in. Hub	3/4 in. Hub
	3	7/8 (22) 1/2 in. Hub	1-1/8 (29) 3/4 in. Hub	1-31/32 (50) 1-1/2 in. Hub	2-15/32 (63) 2 in. Hub	1-3/8 (35) 1 in. Hub	1-31/32 (50) 1-1/2 in. Hub	1-3/8 (35) 1 in. Hub	1-23/32 (44) 1-1/4 in. Hub

Bulletin No.	NEMA Size	Approximate Dimensions in Inches (Millimeters)					
		U		V		W	
		Inside	Outside	Inside	Outside	Inside	Outside
1232 1233	1	7/8 (22)	1-1/8 (29)	—	—	7/8 (22)	1-1/8 (29)
	2	1/2 in. Hub	3/4 in. Hub	—	—	1/2 in. Hub	3/4 in. Hub
	3	7/8 (22) 1/2 in. Hub	1-1/8 (29) 3/4 in. Hub	1-31/32 (50) 1-1/2 in. Hub	2-15/32 (63) 2 in. Hub	3 (76) 2-1/2 in. Hub	3 (76) 2-1/2 in. Hub

Starters Without Overload Relays for Field Assembly of Starters Using Bulletin 592 Overload Relays ❖

These products are intended for field installation of Bulletin 592 Eutectic, or 592 electronic overload relays (select Bulletin 592 overload relays from page 1-161...page 1-164). The overload relays ship in a starter carton with provisions for mounting the overload relay (includes a starter mounting plate, screws/bolts, and instructions).

Eutectic Alloy Overload Relays — Overload relay codes do not apply. Use Cat. No. as listed in the product selection tables. Select heater elements from page 1-167.

❖ All Sizes — No overload relay.

Bulletins 520, 522, and 523 require two overload relays.

Bulletins 530, 1282, and 1283 require two overload relays. When selecting the proper electronic overload relay or heater, divide motor nameplate full load amperes by 2.00. Use this value to select the proper overload relays.

Bulletins 540, 1242, and 1243 have one overload relay. When selecting the proper electronic overload relay or heater, divide motor nameplate full load amperes by 1.73. Use this value to select the proper overload relays.

E1 Plus Solid-State Three-Phase Overload Relay
(Selectable Class 10, 20, or 30) (Automatic/Manual Reset)

For use with Bulletins 505, 505V, 506, 507, 509, 512, 512M, 513, 520, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1232, 1232X, 1233, 1233X, 1242, 1243, 1272, 1273, 1282, and 1283. ⚡ ➤ ⚙

NEMA Size	Full Load Current Adjustment Range [A]	Overload Relay Code
		Class 10, 15, 20, 30
00	0.1...0.5	A2A
	0.2...1.0	A2C
	1.0...5.0	A2E
	3.2...16	A2F
0, 1 1PW 1YD	0.2...1.0	A2C
	1.0...5.0	A2E
	3.2...16	A2F
	5.4...27	A2G
1	9...45	A2J
	5.4...27	A2G
2 2PW 2YD	9...45	A2J
	18...90	A2L
3 3PW 3YD	30...150	A2M
	60...300	A2N
6 6PW 6YD	256...810	A2T
	384...1215	A2U
9+	800...2250	A2V

E1 Plus Solid-State Single-Phase Overload Relay
(Selectable Class 10, 20, or 30) (Automatic/Manual Reset)

For use with Bulletins 505, 505V, 506, 507, 509, 512, 512M, 513, 520, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1232, 1232X, 1233, 1233X, 1242, 1243, 1272, 1273, 1282, and 1283. ⚡ ➤ ⚙

NEMA Size	FLC Adjustment Range [A]	Overload Relay Code
00	1.0...5.0	S2E
	3.2...16	S2F
	5.4...27	S2G
0...2	1.0...5.0	S2E
	3.2...16	S2F
	5.4...27	S2G
	9...45	S2J
3	18...90	S2L

➤ These overload relays have an interposing relay with a 120V AC coil.

⚡ Bulletin 520, 522, and 523 require two overload relay codes to complete the Cat. No. The first code will denote the high speed overload relay and the second code will denote the low speed overload relay.

➤ Bulletins 530, 532, 533, 1282, and 1283 have two overload relays and require two overload relay codes to complete the Cat. No. When selecting the proper overload relay, divide motor nameplate full load amperes by 2.00. Use this value to select the proper overload relay codes.

⚙ Bulletins 540, 542, 543, 1242, and 1243 have one overload relay. When selecting the proper overload relay, divide motor nameplate full load amperes by 1.73. Use this value to select the proper overload relay code.

E3 Electronic Overload Relay: 2 Inputs/1 Output

For use with Bulletins 509, 512, 512M, 513, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1232, 1232X, 1233, 1233X, 1242, 1243, 1272, 1273, 1282, and 1283.

NEMA Size	FLC Adjustment Range [A]	Overload Relay Code*
00	1...5	EC1A
	3...15	EC1B
0...2	1...5	EC1A
	3...15	EC1B
	5...25	EC1C
3	9...45	EC1D
	9...45	EC1D
	18...90	EC1E
4	28...140	EC1F
5	60...302	EC1H
6	125...630	EC1K

E3 Plus Electronic Overload Relay: 4 Inputs/2 Outputs, Built-In Ground Fault Sensor, PTC Thermistor Input

For use with Bulletins 505, 505V, 506, 507, 509, 512, 512M, 513, 520, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1232, 1232X, 1233, 1233X, 1242, 1243, 1272, 1273, 1282, and 1283; **excluding Modular Kits.***

NEMA Size	FLC Adjustment Range [A]	Overload Relay Code*
00	1...5	EC2A
	3...15	EC2B
0...2	1...5	EC2A
	3...15	EC2B
	5...25	EC2C
	9...45	EC2D
3	9...45	EC2D
	18...90	EC2E
4	28...140	EC2F
5	60...302	EC2H

* Bulletin 520 requires two overload relay codes to complete the cat. no. The first code will denote the high speed overload relay and the second code will denote the low speed overload relay.


⚙ Rockwell Automation recommends using 120 or 240V AC coils on all NEMA Starters with E3 or E3 Plus electronic overload relays. When using coil voltages other than 120 or 240V AC, consult your local Rockwell Automation sales office or Allen-Bradley distributor.

Bulletin 500 Line
Approximate Dimensions
 NEMA AC Contactors

Approximate dimensions are shown in inches (millimeters). Dimensions are not intended to be used for manufacturing purposes.

Open Type without Enclosure for Bulletin 500FL, 500L, and 500LP and for NEMA sizes 00, 5...9 for Bulletin 500 and 500F Contactors

1

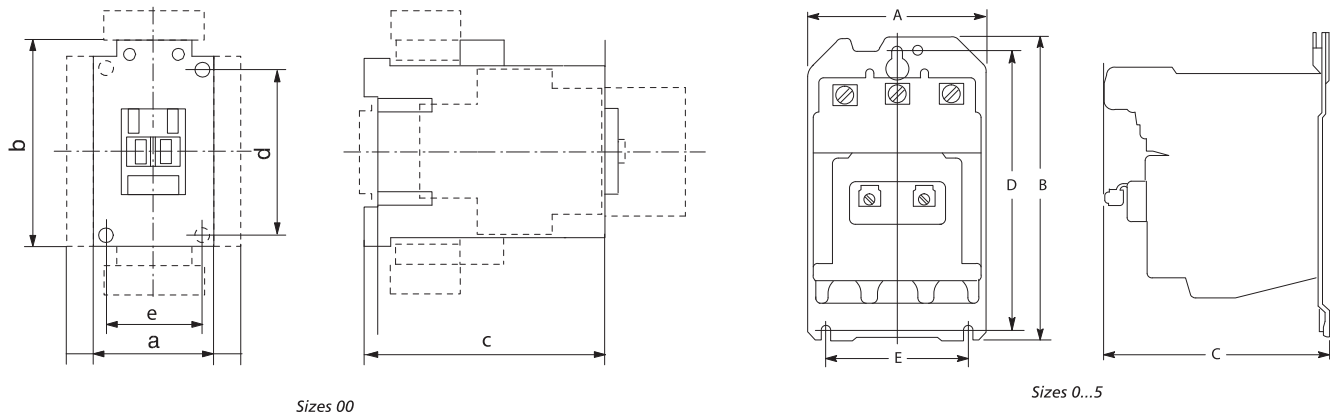

Note: Top mounting hole on Size 00 is 1/4 in. (6.35 mm) to the left of centerline on Open Type. Mounting screws: 3...#10 for sizes 0...2, 1/4...#20, or 5/16...#18 for sizes 3...5.

NEMA Size	Number of Switching Poles		Dimensions in Inches (Millimeters)					Approximate Shipping Weight [lb (kg)]
	Bulletin 500 500F-500FL	Bulletin 500L-500LP	A Width	B Height	C Depth	D	E	
00 5/10A	1-2-3	2...3	1-25/32 (45)	3-3/16 (81)	3-11/64 (80.5)	2-23/64 (60)	1-25/64 (35)	1 (0.45)
0...1 15/20A 30A	2...3	2...3	3-9/16 (90.5)	6 (152)*	4-15/32 (113)	5-1/2 (140)	2-3/4 (70)	3 (1.4)
	4	—	4-3/8 (111)					3-1/2 (1.6)
	5	4	4-15/16 (125)					4-3/4 (2.2)
2 60A	2...3	2...3	3-15/16 (100)	6-27/32 (173)*	4-23/32 (120)	6-5/16 (160)	3-5/32 (80)	4 (1.8)
	4	—	4-31/32 (126)					4-3/4 (2.2)
	5	4	5-1/2 (140)					6-1/4 (2.8)
3 100A	2...3	2...3	6-1/8 (155.5)	10-3/64 (255)	6-19/32 (167.4)	8-21/32 (220)	5-33/64 (140)	14.5 (6.5)
	4	—	7-15/16 (201.6)					16 (7.25)
	5	4	8-13/16 (223.8)					18 (8)
4 200A	2...3	2...3	7 (178)	12-11/64 (309)*	7-13/16 (198.4)	9-27/32 (250)	6-5/16 (160)	22 (10)
	4	—	9-1/16 (230.2)					25.5 (11.5)
	5	4	10-7/16 (265.1)					28.5 (13)
5 300A	2...3	2...3	7 (178)	13-25/64 (340)†	8-17/32 (217)	9-27/32 (250)	6-5/16 (160)	24 (10.9)


* For Feed-Through Wiring this dimension is 6-15/16 in. (176 mm).
 * For Feed-Through Wiring this dimension is 11-11/16 in. (297 mm).
 † For Feed-Through Wiring this dimension is 12-37/64 in. (320 mm).

Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters



Contactor Accessories

For use on Bulletins 500, 500F, 500L, 500FL, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1233X, and 1233V

Description	NEMA Size	Cat. No.	
	0...1	Coils (60 Hz) 115...120V	CB-236
		200...208V	CB-249
		230...240V	CB-254
		460...480V	CB-273
		575...600V	CB-278
	2	115...120V	CC-236
		200...208V	CC-249
		230...240V	CC-254
		460...480V	CC-273
		575...600V	CC-278
	3	115...120V	CD-236
		200...208V	CD-249
		230...240V	CD-254
		460...480V	CD-273
		575...600V	CD-278
	4	115...120V	CE-236
		200...208V	CE-249
		230...240V	CE-254
		460...480V	CE-273
		575...600V	CE-278
5 (SER. L)	115...120V	AF-236	
	200...208V	AF-249	
	230...240V	AF-254	
5	460...480V	AF-273	
575...600V	AF-278		



Note: For complete listing of coils available, see page 1-157


Surge Suppressor — Made to be easily mounted directly across the coil terminals of contactors and starters with 120V or 240V AC coils. The purpose of the suppressor is to limit voltage transients for applications requiring interface with solid-state components. One suppressor is required per coil.

	RC Module AC Operating Mechanism 24...48V AC, 50/60 Hz	00*	100-FSC48
	110...280V AC, 50/60 Hz		100-FSC280
	380...480V AC, 50/60 Hz		100-FSC480
	Varistor Module AC/DC Operating Mechanism 12...55V AC/ 12...77V DC	00*	100-FSV55
	56...136V AC/ 78...180V DC		100-FSV136
	137...277V AC/ 181...350V DC		100-FSV277
	278...575V AC		100-FSV575
	12...120V AC		599-K04
	240...264V AC Varistor	0...5	599-KA04
	12...120V AC		199-FSMA1*
	12...120V AC Varistor		199-GSMA1‡
	120V AC	7...8	700-N24

Cat. No. 100-FSC280

Cat. No. 599-K04

Description	NEMA Size	Cat. No.	
	Terminal and Lug Covers	0...1	599-TC01N
	Line side terminal covers	2	599-TC2N
		3	599-TC3N
		4	599-TC4N
		5	599-TC5N
Line side terminal covers (reversing)	0...1	599-TC01R	
	Tie Point Terminal	0...2	599-TP02
		3...5	599-TP34

Description	For Use With	No. of Poles	NEMA Size	Cat. No.
	Protective Covers 500/F/FL, 500L, 500LP, 505	3	0...1	599-PC01
	509, 505, 520E (2), 520F/G	3	0...1	599-PS01 ➤
	500L, 500LP	5	0...1	599-PC01-5 ‡
	520F/G	5	0...1	599-PS01-5 ➤
	500/F/FL, 500L, 500LP, 505	3	2	599-PC2
	509, 505, 520E (2), 520F/G	3	2	599-PS2 ➤
	500L, 500LP	5	2	599-PC2-5 ‡
	520F/G	5	2	599-PS2-5 ➤
	500/F/FL, 500L, 500LP, 505	3	3	599-PC3
	509, 505, 520E (2), 520F/G	3	3	599-PS3 ➤
	500L, 500LP	5	3	599-PC3-5 ‡
	520F/G	5	3	599-PS3-5 ➤
	500/F/FL, 500L, 500LP, 505	3	4	599-PC4
	509, 505, 520E (2), 520F/G	3	4	599-PS4 ➤
	500L, 500LP	5	4	599-PC4-5 ‡
520F/G	5	4	599-PS4-5 ➤	
500/F/FL, 500L, 500LP	3	5	599-PC5	
509	3	5	599-PS5 ➤	

‡ Used on 5-pole contactors and starters.

➤ Bul. 592 Eutectic alloy or solid-state overload relays.

* For non-combination starters only.
 * For use on the interposing relay.
 ‡ For use on the contactor or starter.

Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Contactors Accessories, continued

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X and 1233V

1

Timer Attachment Kit — A pneumatic timer attachment may be field installed in the space of two adjacent auxiliary contact blocks. Timing units are available for either ON-Delay or OFF-Delay operation with a timed set of one (1) N.O. and one (1) N.C. snap-action contacts that are electrically isolated.

Repetitive accuracy within the timer range is approximately ±10% provided a minimum reset time of 75 ms is allowed.


Note:

- Sizes 0...5: Timers can be added to the left- or right-hand side of the contactor body. On Size 00 they can be mounted to the front of the contactor.
- Size 0, 1 and 2: Timers cannot be used on the same side as power pole adders.
- Size 2 Devices: The operating coil must be changed. See [T-1678929] and refer to the size 2 operating coil listing. Order the coil listed for a 4-...5-pole device.


Note: These coils can also be factory installed.

- Enclosed Devices: Please contact your local Rockwell Automation sales office or Allen-Bradley distributor.

Contact Ratings: NEMA A600 (10 A, 600V AC max.)
NEMA P300 (5 A, 300V DC max.)

Description	NEMA Size	Cat. No.
 Cat No. 596-TR32	On-Delay	100-FPTA30
	On-Delay	100-FPTA180
	Off-Delay	100-FPTB30
	Off-Delay	100-FPTB180
Left-hand ON Delay	00§	596-TL32
		596-TL33
		596-TR32
		596-TR33
Right-hand ON Delay	0...5	596-TL32
		596-TL33
		596-TR32
		596-TR33
Right-hand OFF Delay		596-TR33

§ For open type, non-combination starters only.

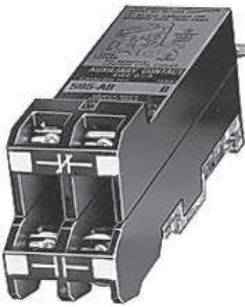
Description	NEMA Size	Cat. No.
 Auxiliary Contact — Contactors	1 N.O.	0...5 595-A
	2 N.O.	0...5 595-AA
	1 N.C.	0...5 595-B
	2 N.C.	0...5 595-BB
	1 N.O. and N.C.	0...5 595-AB
	1 N.C.L.B.	0...5 595-BL
	1 N.O.	6 195-GA10
	1 N.O.	7 ♣ 1495-J6
	2 N.O.	6 195-GA20
	2 N.O.	7...8 ♣ 1495-K6
	2 N.O.	9 ♣ 1495-K8
	1 N.C.	6 195-GB01
	1 N.C.	7...9 ♣ 1495-J6
	2 N.C.	6 195-GB02
	2 N.C.	7...8 ♣ 1495-K6
	2 N.C.	9 ♣ 1495-K8
1 N.O. and N.C.	6 195-GB11	
2 N.O.	7...8 ♣ 1495-K6	
2 N.O.	9 ♣ 1495-K8	
1 N.C.L.B.	6 195-GL01	

♣ The normally open contacts can easily be changed to normally closed in the field.

Power Pole Adders — The 1 N.O. and 1 N.C. power poles may be field added to all size 0...4 Bulletin 500 line contactors and starters except the Bulletin 500L and 500FL. Two- and three-pole contactors will accept a maximum of two adder poles and four-pole devices will accept one adder pole. Each adder pole kit includes a mechanical load balancer to be used when only one power pole is added.

Note: When power poles are added to Size 2, 3, or 4 (2- or 3-pole devices) the operating coil must be changed. Refer to the listing for the size of your contactor or starter. Order the operating coil listed for a 4-...5-pole device.


Note: These coils can also be factory installed.

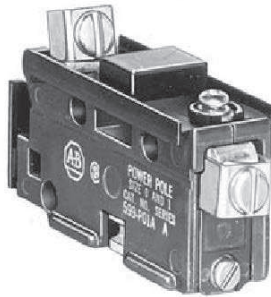Description	NEMA Size	Cat. No.
 Cat. No. 599-P01A (1 N.O.) Size 0...1, 27 Amps.	1 N.O.	599-P01A
	1 N.C.	599-P01B
	1 N.C. Late Break	599-P01BL
	1 N.O.	599-P2A
	1 N.C.	599-P2B
	1 N.C. Late Break	599-P2BL
	1 N.O.	599-P3A
	1 N.C.	599-P3B
1 N.O.	4	599-P4A
1 N.C.		599-P4B

Contactors Kick-off Springs — For horizontal mounting of 2- or 3-pole Bulletin 500 contactors and starters.


Note: When kick-off springs are added to Size 2, 3 or 4, the operating coil must be changed. Refer to the listing for the size of your contactor or starter. Order the operating coil listed for a 4-pole device.

Note: These coils can also be factory installed.

Description	NEMA Size	Cat. No.
	0...1	599-N11
	2	599-N12
	3	599-N13
	4...5	599-N14


Wire Size	NEMA Size	Cat. No.
Lug Connectors (3 per package)		
#14...8 AWG Wire	0...1	*
#14...4 AWG Wire	2	1494R-N1
#8...1/0 AWG Wire	3	1494R-N2
#6...4/0 AWG Wire	4	1494R-N3
2 of #1/0...350 MCM Wire	5	42450-804-01

* All terminals of the 30 A switches are furnished with self-lifting pressure plate connectors as standard.

Description	NEMA Size	Cat. No.
 Terminal Lug Kit	6	199-LJ1
Terminal Lug Kit	7...8	199-LG1

Contactor Accessories, continued

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X and 1233V

Description	NEMA Size	Cat. No.
Auxiliary Contact Adder Decks — The same 2- and 4-pole auxiliary contact blocks in various combinations of normally open and normally closed will slide and snap on to the front of the contactor. Adder decks have convenient backed out wire clamps to make lugging of control wires unnecessary. Fits on Open Type devices only.		
 <p>4-pole</p>	2 N.O.	100-FA20
	1 N.O. -1 N.C.	100-FA11
	2 N.C.	100-FA02
	4 N.O.	100-FA40
	3 N.O.-1 N.C.	100-FA31
	2 N.O. -2 N.C.	100-FA22
	4 N.C.	100-FA04

24V DC Interface Module — Mounts to the top of the contactor. It provides a 24V DC, 0.5 w input signal that can be used to operate the 24...240V AC coil of the contactor. **Fits on Open Type devices only.**


	—	00	100-JE
---	---	----	--------

Latch Attachment — On the front of the contactor. **Fits on Open Type devices only.**

	—	00	100-FL11⊗
--	---	----	-----------

Interposing Contactor — For open type Bulletin 500 and 500L.

Top Wiring Kit — Consists of (3) power lugs for the purpose of making extra connections to the load side of the contactor. A second set of overload relays can be wired to these lugs if two motors are being controlled by a single contactor.

 <p>Cat No. 599-TW01</p>	—	0...1	599-TW01
	—	2	599-TW2
	—	3	599-TW3
	—	4	599-TW4
	—	5	599-TW5P

⊗ Voltage Suffix Code

The cat. no. as listed is incomplete. Select a voltage suffix code from the table below to complete the Cat. No.

Example: 120V, 60 Hz: **Cat. No. 100-FL11**⊗ becomes **Cat. No. 100-FL11D**. For other voltages, please consult your local Rockwell Automation sales office or Allen-Bradley distributor.


[V]	24	48	100	110	120	230... 240	240	277	380... 400	400... 415	400	480
50 Hz	K	Y	KP	D	—	VA	T	—	N	G	B	—
60 Hz	J	—	—	—	D	—	A	T	—	—	N	B

‡ To complete cat. no., insert in the third position the desired numeric symbol (0...5) or one of the following letters — A, B, C, D, E, F, H, L, M, P, R, S, T, U, or W.

Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Contactor Accessories, continued

Description		Enclosure Type	NEMA Size	Cat. No.
	Adapter Plates — For replacement of: <ul style="list-style-type: none"> • Allen-Bradley (Bulletin 709 Series K) • Cutler Hammer (Citation & Freedom Series) • Furnas (Class 14 and ESP 100) • General Electric (Series 300) • Joslyn-Clark (Type HP) • Square D (Type S) • Westinghouse (A200 and W200 Advantage) 	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0, 1	599-CP01
			2	599-CP2


For use on Bulletins 512V, 513V, 1232V, 1233V


Contactors are supplied with one normally open and one normally closed auxiliary contact (A600 rating) as standard. Additional auxiliary contacts, two normally open and two normally closed, can be added in the field.

Description	Cat. No.
Auxiliary Contact (10 A @ 600V)	1195C-N3
Auxiliary Contact (10 mA @ 5V DC)	1195C-N4

Overload Accessories

For use on Bulletins 500, 500F, 500FL, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

Description	NEMA Size	Cat. No.	
 Auxiliary Contact — For eutectic alloy overload relays only* Contact Ratings — NEMA A600 (10 A, 600V AC max.) NEMA P300 (5 A, 300V DC max.)	Auxiliary Contact — For eutectic alloy overload relays only*		
	1 N.O.	00, 3-phase*	595-A00
	1 N.C.	00, 3-phase*	595-B00
	1 N.O.	0...2, 5...9	595-A02
	1 N.C.		595-B02
	1 N.O.	3...4	595-A34‡
1 N.C.	595-B34§		

Description	Max. Continuous Current Rating [A]	Cat. No.
 DIN Rail Mounting Adapter for Bulletin 592 compact type 3-pole overload relays	40	599-MP1
	62	599-MP2

* Auxiliary contact for solid-state overload relays is included in the product.

‡ Non-combination starters only.

‡ Auxiliary contact mounted on right-hand side of overload relay provides N.O. contact function. Auxiliary contact mounted on left-hand side of overload relay provides N.C. contact function.


§ To be mounted on right-hand side of overload to provide additional AC contact function.

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Voltage Control Accessories

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V; **excluding Modular Kits**


Control Circuit Transformer with Top-Mounted Fuse Block Kits (pre-wired)*❄

	NEMA Size	Primary Voltage	Capacity – 120V Secondary Voltage									
			Standard		100 W Extra		200 W Extra		300 W Extra		400 W Extra	
			VA	Cat. No.	VA	Cat. No.	VA	Cat. No.	VA	Cat. No.	VA	Cat. No.
	0...2	208V	80	1497-N1PK	130	1497-N15PK	250	1497-N7PK	350	1497-N10PK	500	1497-N18PK
		240V & 480V		1497-N2PK		1497-N16PK		1497-N8PK		1497-N11PK		1497-N19PK
		600V		1497-N3PK		1497-N17PK		1497-N9PK		1497-N12PK		1497-N20PK
	3	208V	200	1497-N4PK	250	1497-N7PK	350	1497-N10PK	500	1497-N18PK	500	1497-N18PK
		240V & 480V		1497-N5PK		1497-N8PK		1497-N11PK		1497-N19PK		1497-N19PK
		600V		1497-N6PK		1497-N9PK		1497-N12PK		1497-N20PK		1497-N20PK
	4	208V	250	1497-N7PK	350	1497-N10PK	500	1497-N18PK	—	—	—	—
		240V & 480V		1497-N8PK		1497-N11PK		1497-N19PK		—		—
		600V		1497-N9PK		1497-N12PK		1497-N20PK		—		—
	5	208V	350	1497-N10PK	500	1497-N18PK	—	—	—	—	—	—
		240V & 480V		1497-N11PK		1497-N19PK		—		—		
		600V		1497-N12PK		1497-N20PK		—		—		
6	208V	500	1497-N18PK	—	—	—	—	—	—	—	—	
	240V & 480V		1497-N19PK		—		—		—		—	
	600V		1497-N20PK		—		—		—		—	

* Transformers for NEMA sizes 7...9 are included as standard.

❄ Type 4/4X non-metallic enclosures and Type 7 & 9 hazardous location enclosures require transformers with separately mounted fuse blocks. For a complete listing of transformers, see page 8-39.

Control Circuit Transformers with Top Mounted Fuse Blocks‡❄

	NEMA Size	Primary Voltage/ 3 Pole Fuse Block	Capacity – 120V Secondary Voltage	
			Standard	
			VA	Cat. No.
	0...2	208V	80	1497-B-HXDX-3-N
		240V & 480V		1497-B-BASX-3-N
		600V		1497-B-CXSX-3-N
	3	208V	200	1497-D-HXDX-3-N
		240V & 480V		1497-D-BASX-3-N
		600V		1497-D-CXSX-3-N
	4	208V	250	1497-E-HXDX-3-N
		240V & 480V		1497-E-BASX-3-N
		600V		1497-E-CXSX-3-N
5	208V	350	1497-F-HXDX-3-N	
	240V & 480V		1497-F-BASX-3-N	
	600V		1497-F-CXSX-3-N	

‡ Transformers can be installed in Type 1, 3R, 3R/4/12 painted enclosures and Type 4/4X stainless steel enclosures.

❄ Type 4/4X non-metallic enclosures and Type 7 & 9 hazardous location enclosures require transformers with separately mounted fuse blocks. For a complete listing of transformers, see page 8-39.

Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Voltage Control Accessories, continued

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1232X, and 1233V; **excluding Modular Kits**

For Use When Fuse Block Is Not Integrated with the Transformers

1



Cat. No. 1491-R165
1-Pole Fuse Block



Cat. No. 1491-R167
2-Pole Fuse Block



Cat. No. 1491-R171
3-Pole Fuse Block



Cat. No. 1491-R169
3-Pole Fuse Block



Cat. No. 1491-R150
Fuse Cover without Fuse*

These control circuit fusing kits are intended to be used for control circuit transformer protection and protection of control circuits capable of delivering no more than 200 000 RMS symmetrical amperes, 600V maximum. (Fuses not included.)

Description*	Cat. No.
One-pole kit — panel-mounted (midget fuse)*	1491-R165
Control Circuit Fuse Block For Class CC rejection type fuses (fuses not included)*	1491-R162
Two-pole kit — panel-mounted (two midget fuses)*	1491-R167
Three-pole kit — panel-mounted (one midget fuse/two Class CC fuses)*	1491-R169
Three-pole kit — panel-mounted (three Class CC fuses)	1491-R171
Single-pole kit — Bulletin 500 line controller mounted (Class CC fuses)†	599-FR04
One-pole kit — panel-mounted (31...60 A Class J fuse)	1491-R173
One-pole kit — panel-mounted (61...100 A Class J fuse)	1491-R175


* For control circuit transformers with a 350 VA or larger rating, it is recommended that Bussmann Type FNQ-R, Ferraz-Shawmut Type ATDR, Littelfuse Type KLDR time delay fuses, or equivalent be used for primary fusing.

* These kits use only Class CC or midget fuses (rated 0.5...30 A) such as those offered by the following manufacturers:

- Bussmann KTK-R
- Ferraz-Shawmut ATM R
- Littelfuse KLK

† **Cat. No. 599-FR04** is rated for 6 A fuse maximum. Controller mounting applies to size 0...5 devices only.

* One cover per pole is required. Example: transformer with top-mounted fuse block requires three covers. Fuse block kit for separate control requires two covers. Fuses not included.




Description	NEMA Size	Cat. No.
 Single-pole kit — Bulletin 500 line controller mounted (Class CC fuses)	0...5	599-FR04

Note: One cover per pole is required. Example: transformer with top-mounted fuse block requires three covers. Fuse block kit for separate control requires two covers.

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Disconnect Switch Accessories

For use on Bulletins 502, 502L, 506, 506X, 512, 512H, 512M, 512V, 522, 532, 542, 572, 1242, 1272, 1282, 1232X, and 1232V

	Description	NEMA Size	Cat. No.
	Fuse Clips		
	0...30 A, 250V AC, Class H	0...2	1401-N41
	0...30 A, 250V AC, Class J	1...3	1401-N42
	0...30 A, 600V AC, Class H		
	0...30 A, 600V AC, Class J		
	31...60 A, 250V AC, Class H		
	31...60 A, 250V AC, Class J	1...3	1401-N43
	31...60 A, 600V AC, Class H		
	31...60 A, 600V AC, Class J		
	61...100 A, 250V AC, Class H	2...4	1401-N44
	61...100 A, 250V AC, Class J		
	61...100 A, 600V AC, Class H		
	61...100 A, 600V AC, Class J		
	101...200 A, 250V AC, Class H	3...5	1401-N45
	101...200 A, 250V AC, Class J		
	101...200 A, 600V AC, Class H		
	101...200 A, 600V AC, Class J		
	201...400 A, 250V AC, Class H	4...5	1401-N46
	201...400 A, 250V AC, Class J		
	201...400 A, 600V AC, Class H		
	201...400 A, 600V AC, Class J		
	0...30 A, 250V AC, Class R	0...2*	1401-N50
	0...30 A, 600V AC, Class R		1401-N51
	31...60 A, 250V AC, Class R		1401-N52
	31...60 A, 600V AC, Class R	1...3	1401-N53
	61...100 A, 250V AC, Class R	2...4	1401-N54
	61...100 A, 600V AC, Class R		
	101...200 A, 250V AC, Class R	3...5	1401-N55
	101...200 A, 600V AC, Class R		
	201...400 A, 250V AC, Class R	5...6	1401-N55
	201...400 A, 600V AC, Class R		
	0...30 A, 250V AC HRC Form II Fusing*	0...2*	⌘
	0...30 A, 600V AC HRC Form II Fusing*		
	31...60 A, 250V AC HRC Form II Fusing*		
	31...60 A, 600V AC HRC Form II Fusing*		
	Auxiliary Contacts for Disconnect Switches		
	1 N.O.	0...5	1495-N8
	1 N.C.	0...5	1495-N9

* HRC Form II fusing for Canada only.

* For 0...30 A only.

⌘ Fuse clip not required. Fuse bolts directly to switch and trailer fuse block.

Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Disconnect Switch Accessories, continued

For use on Bulletins 502, 502L, 506, 506X, 512, 512H, 512M, 512V, 522, 532, 542, 572, 1242, 1272, 1282, 1232X, and 1232V

1



Cat. No. 1494R-N3

Description		For Use With	Cat. No.
Lug Connectors (3 per package)			
Disconnect Size [A]	Wire Size	1494C, 1494F, 1494G, and 1494V Disconnect Switches	
30	#14...8 AWG Wire		*
60	#14...4 AWG Wire		§ 1494R-N1
100	#8...1/0 AWG Wire		§ 1494R-N2
200	#6...4/0 AWG Wire		§ 1494R-N3
400	#6...250 MCM AWG 16 mm ² ...120 mm ²		1494R-N14
400	#4 AWG...500 MCM Wire (oversized)		1494R-N15
600	(2) of #1/0...350 MCM Wire		§ 1494R-N10
600	(2) of #1/0...350 MCM Wire	1491-N621 or 1491-R621 600 A fuse blocks	♣ 1494R-N11



Protective Fuse Covers				
Switch Rating [A]	Fuse Class	Fuse Clip Rating [A]		Cat. No.
		250V	600V	
30	Non-fusible	—	—	1495-N64
30	H, R	30	—	
60	H, R	60	—	
30	J	30	30	
60	J	60	60	
60	Non-fusible	—	—	
100	Non-fusible	—	—	
30	H, R	—	30	1495-N65
60	H, R	—	60	
100	J	100	100	
100	H, R	100	100	1495-N66
	J	200	200	
200	Non-fusible	—	—	▶ 1495-N67
200	H, J, R	200	200	
	J	400	400	
200	Non-fusible	—	—	⌘ 1495-N62
200	H, J, R	200	200	
400	Non-fusible	—	—	▶ 1495-N68
400	H, J, R	400	400	
400	Non-fusible	—	—	⌘ 1495-N63
400	H, J, R	400	400	
600	Non-fusible	—	—	▶ 1495-N61
	J	600	600	

* All terminals of the 30 A switches are furnished with self-lifting pressure plate connectors (N56, N57, and N58) as standard.

§ Each kit contains three lugs.

♣ Each kits contains two lugs.




▶ Switch with right-hand mechanism.

⌘ Switch with left-hand mechanism.



Circuit Breaker Accessories

For use on Bulletins 503, 503L, 507, 507X, 513, 513H, 513M, 513V, 523, 533, 543, 573, 1243, 1273, 1283, 1233X, and 1233V

	Description	NEMA Size	Cat. No.	
	Circuit Breaker Kits			
	3 A, 0...1/3 Hp @ 200 and 230V 3 A, 0...1 Hp @ 460 and 575V	0...1	1401-N60	
	7 A, 0.5...1 Hp @ 200 and 230V 7 A, 1.5...3 Hp @ 460 and 575V	0...1	1401-N61	
	15 A, 1.5...3 Hp @ 200 and 230V 15 A, 5...7.5 Hp @ 460 and 575V	0...1	1401-N62	
	30 A, 5 Hp @ 200V 30 A, 5...7.5 Hp @ 230V 30 A, 10...15 Hp @ 460 and 575V	1...2	1401-N63	
	50 A, 5...10 Hp @ 200V 50 A, 10 Hp @ 230V 50 A, 20...25 Hp @ 460V 50 A, 20...30 Hp @ 575V	1...3	1401-N64	
	100 A, 15...25 Hp @ 200 and 230V 100 A, 30...50 Hp @ 460V 100 A, 40...50 Hp @ 575V	2...4	1401-N65	
	150 A, 30 Hp @ 200V 150 A, 30...40 Hp @ 230V 150 A, 60...75 Hp @ 460V 150 A, 75...100 Hp @ 575 V	3...4	1401-N66	
	250 A, 125 Hp @ 575V	5	1401-N68	
	250 A, 50...60 Hp @ 200V 250 A, 60...75 Hp @ 230V		1401-N69	
		Auxiliary Contacts for Disconnect Switches		
		One normally open (1 N.O.) Adapter kit may be required. * Bolted — One normally open (1 N.O.)* Unilock — One normally open (1 N.O.)*	0...5‡ 4...5§	1495-N8
One normally closed (1 N.C.) Adapter kit may be required.* Bolted — One normally closed (1 N.C.)* Unilock — One normally closed (1 N.C.)*	0...5	1495-N9		
	Unilock — One normally open (1 N.O.)*	0...2	1495-N14	
	Unilock — One normally closed (1 N.C.)*	0...2	1495-N15	
	HMCP Circuit Breaker Adapter Kits (for mounting 1 or 2 auxiliary contacts)	5	1495-N16	
	400 A Frame*			
	150 A Frame	3...4	1495-N21	
	250 A Frame - Enclosure Type 1, 3R/4/12, 3R and 4/4X (stainless steel)	4...5♣	1495-N22	
	250 A Frame - Enclosure Type 7 & 9 (bolted & Unilock) and 4/4X (non-metallic)	0...5➤		
	250 A Frame - Enclosure Type 1, 3R/4/12, 3R, and 4/4X (stainless steel)	4	1495-N23	
Unilock — 150 A Frame*	3...4	1495-N21		
Unilock — 250 A Frame*	4...5	1495-N22		

* Contact Ratings — NEMA B600 and NEMA P600.

* Not available on larger sizes 6...9.

‡ For Bolted and 1 N.O.

§ For Unilock 1 N.C.

♣ For Enclosure Type 1.

➤ For Enclosure Types 7 & 9.

1



Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Pilot Device Accessories

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

1



Description	Enclosure Type	NEMA Size	Cat. No.		
Selector Switch Kits					
	OFF-ON/HAND-OFF-AUTO*❖	1 (Lift-off)	00...2		
			599-SSL		
			599-SS2L		
	HAND-OFF-AUTO	1, 3R/4/12	0...5	599-SS09HJ	
		4, 4X (stainless steel and non-metallic)		599-SS09HS	
	OFF-ON	1, 3R/4/12		599-SS09OJ	
		4, 4X (stainless steel and non-metallic)		599-SS09OS	
	FOR-OFF-REV	1, 3R/4/12		599-SS09RJ	
		4, 4X (stainless steel and non-metallic)		599-SS09RS	
	TEST-OFF-AUTO (spring return from TEST)	1, 3R/4/12		599-SS09TJ	
		4, 4X (stainless steel and non-metallic)		599-SS09TS	
	FOR-OFF-REV (Unilock)	3R, 7 & 9		0...2	1481-N48
	OFF-ON (Unilock)			1481-N54	
	HAND-OFF-AUTO (Unilock)		1481-N55		
OFF-ON (Unilock)	1481-N59				
HAND-OFF-AUTO (Unilock)	3...5		1481-N60		
FOR-OFF-REV (Unilock)	1481-N62				
Push Button Kits					
	START-STOP*❖		1 (Lift-off)	00...2	
			599-PBL		
	START-STOP	1, 3R/4/12	0...5	599-PB09SJ	
		4, 4X (stainless steel and non-metallic)		599-PB09SS	
	FOR-REV-STOP	1, 3R/4/12		599-PB09RJ	
		4, 4X (stainless steel and non-metallic)		599-PB09RS	
	HIGH-LOW-STOP	1, 3R/4/12		599-PB09WJ	
		4, 4X (stainless steel and non-metallic)		599-PB09WS	
	START-STOP (Unilock)	7 & 9	0...2	1481-N53	
			3...5	1481-N58	
START-STOP (bolted)	0...9		Use 800H-DPH16AAXX64		

* Must order mounting bracket (Cat. No. 599-BRL) separately.

❖ For Type 1, lift-off, non-combination starters only (Bulletins 500, 500L, 505, and 509).

Pilot Device Accessories, continued

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

Description	Enclosure Type	NEMA Size	Cat. No.	
	Pilot Light Kits ‡ 120V	1, 3R/4/12	599-PL09DJ	
	120V	4, 4X (stainless steel and non-metallic)	599-PL09DS	
	240V	1, 3R/4/12	599-PL09AJ	
	240V	4, 4X (stainless steel and non-metallic)	599-PL09AS	
	480V	1, 3R/4/12	599-PL09BJ	
	480V	4, 4X (stainless steel and non-metallic)	599-PL09BS	
	600V	1, 3R/4/12	599-PL09CJ	
	600V	4, 4X (stainless steel and non-metallic)	599-PL09CS	
	ON*‡♣	120V AC	1 (lift-off)	599-PLLD
		240V AC		599-PLLA
	Optional Pilot Light Lens Covers	All	0...5	800T-N26R
	Red			800T-N26G
	Green			800T-N26A
	Amber			800T-N26B
Blue	800T-N26C			
Clear	800T-N26W			
White				
ON (Unilock 120V) — Red*§	3R, 7 & 9 (Unilock)	0...5	1481-N56A120R	
ON (Unilock 120V) — Green*§			1481-N56A120G	
	Push-to-Test Pilot Light Kits ‡ 120V	1, 3R/4/12	599-PT09DJ	
	120V	4, 4X (stainless steel and non-metallic)	599-PT09DS	
	240V	1, 3R/4/12	599-PT09AJ	
	240V	4, 4X (stainless steel and non-metallic)	599-PT09AS	
	480V	1, 3R/4/12	599-PT09BJ	
	480V	4, 4X (stainless steel and non-metallic)	599-PT09BS	
	600V	1, 3R/4/12	599-PT09CJ	
	600V	4, 4X (stainless steel and non-metallic)	599-PT09CS	
	Optional Push-to-Test Pilot Light Lens Covers	All	0...5	800T-N40
	Red			800T-N41
	Green			800T-N42
	Amber			800T-N43
	Blue			800T-N45
	Clear			800T-N44
White				
Mounting bracket*‡	All lift-off pilot devices, Type 1	00...2	599-BRL	

* Must order mounting bracket (Cat. No. 599-BRL) separately.

‡ For Type 1, lift-off, non-combination starters only (Bulletins 500, 500L, 505, and 509).

‡ Pilot light kits and push-to-test pilot light kits include one green and one red cover as standard.

§ An adapter (Cat. No. 1481-N61) is required for each pilot light added to Size 3, 4, and 5 Unilock enclosures.

♣ Supplied with red lens only.

Note: Bulletins 505 and 520 with two pilot lights are supplied in hinged enclosures, with or without control circuit transformers.




Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Pilot Device Accessories, continued

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

1

Description	Enclosure Type	NEMA Size	Cat. No.	
ON * (Unilock) — Red Lens (120V)	3R, 7 & 9 (Unilock)	0...5	1481-N56A120R	
ON * (Unilock) — Green Lens (120V)			1481-N56A120G	
Transformers for pilot lights 240V, 60 Hz and 220V, 50 Hz*		00...5	1481-NX1	
480V, 60 Hz and 440V, 50 Hz			1481-NX2	
600V, 60 Hz and 550V, 50 Hz			1481-NX3	
 Replacement Bulbs for all Pilot Lights 120V coil voltage - incandescent Amber, green, red, or blue lens color		—	—	800T-N169
	120V coil voltage - LED Amber lens color	—	—	800T-N320A
	Green lens color	—	—	800T-N320G
	Red lens color	—	—	800T-N320R
	Blue lens color	—	—	800T-N320B
	240/480/600V coil voltage - incandescent Amber, green, red, or blue lens color	—	—	800T-N65
	240/480/600V coil voltage - LED Amber lens color	—	—	800T-N318A
	Green lens color	—	—	800T-N318G
	Red lens color	—	—	800T-N318R
	Blue lens color	—	—	800T-N318B
	Additional Pilot Devices Additional pilot devices	1, 3R/4/12	0...9	Use Bulletin 800T devices (See page 10-2)
	Additional pilot devices	4/4X, 4X	0...9	Use Bulletin 800H Type 4X devices (See page 10-2)
Additional pilot devices (bolted)	3R, 7 & 9	0...9	Use Bulletin 800H Type 7 & 9 devices (See page 10-152)	





* When the control voltage is other than 120V, 60 Hz or 110V, 50 Hz it is necessary to also use one of the following transformers.

* An adaptor (**Cat. No. 1481-N61**) is required for each pilot light added to size 3, 4, and 5 Unilock enclosures.

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

Enclosure Accessories

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

Description		Enclosure Type	NEMA Size	Cat. No.
	Non-metallic Conduit Connectors	4, 4X (stainless steel and non-metallic)	0...1	1490-N1
	1/2 in. (12.7 mm)			1490-N9
	3/4 in. (19 mm)			1490-N10
	1 in. (24.5 mm)			1490-N11
	1-1/4 in. (31.75 mm)			1490-N5
	1-1/2 in. (38.1 mm)			1490-N6
	2 in. (50.8 mm)			1490-N7
	2-1/2 in. (63.5 mm)			1490-N8
	Grounding Adapters	4, 4X (stainless steel and non-metallic)*	0...1	1490-N19
	1/2 in. (12.7 mm), #14...10 AWG			1490-N20
	3/4 in. (19 mm), #14...8 AWG			1490-N21
	1 in. (24.5 mm), #14...8 AWG			1490-N22
	1-1/4 in. (31.75 mm), #14...4 AWG			1490-N23
	1-1/2 in. (38.1 mm), #8...1/0 AWG			1490-N24
	2 in. (50.8 mm), #8...1/0 AWG			1490-N25
	2-1/2 in. (63.5 mm), #6...2/0 AWG			1490-N26
	Handle Kits with Universal Link for Switch and Breaker	1, 3R, 3R/4/12*	0...4	1494F-M1
	Painted Metal 5-1/2 in. base			1494F-M2
	Painted Metal 7-1/2 in. base	4/4X (stainless steel)	0...4	1494F-S1
	Stainless Steel 5-1/2 in. base			1494F-S2
	Stainless Steel 7-1/2 in. base			1494F-P1
Nonmetallic Handle 5-1/2 in. base	1, 3R, 3R/4/12, 4/4X (non-metallic)	0...4	1494F-P1	
	Hole Plugs	All	0...5	800T-N1
	30.5 mm hole plug for pilot devices			598-N1
	19.5 mm hole plug for resets and door safety hardware			

* For combination starters only.

* Bulletin 1490 grounding adapters are available for use with these conduit hubs. These bushings provide a convenient method of connecting a ground wire to the conduit system. See conduit connector (hub) above proper size.


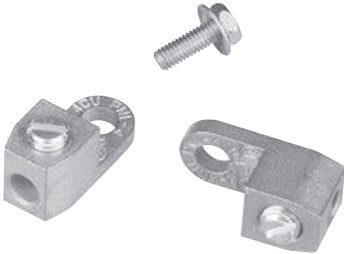
Accessories — Field Installed

NEMA Non-Combination Contactors/Starters and Combination Contactors/Starters

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512M, 512V, 513, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

Enclosure Accessories, continued

1

Description	Enclosure Type	NEMA Size	Cat. No.	
 <p>Door Safety Hardware Kits Enclosure Size (H x W x D) 27 x 10 x 8.2 in.</p>	3R/4/12*	0...2	1494F-V1	
		30 x 20 x 9.7 in.	0...4	1494F-V2
		50 x 22 x 11.1 in.	3...4	1494F-V3
		56 x 30 x 14 in.	5	1494F-V4
<p>Breather Bulletin 505, 507, 509, and 513 — Unilock and bolted Class I, Groups C and D Class II, Groups E, F and G♣‡</p> <p>Drain Bulletin 505, 507, 509, and 513 — Unilock and bolted Class I, Groups C and D Class II, Groups E, F and G♣‡</p> <p>Breather Drain Combination§ Bulletin 505, 507, 509, and 513 — Unilock and bolted Class I, Groups C and D Class II, Groups E, F and G♣‡</p>		0...5	1401-N1	
			1401-N2	
			1401-N3	
 <p>Ground Lug Kits</p>		0...2	599-GR1	
		3...5	599-GR2	
		6...7	599-GR3	

Description of Accessory Kit	Size 0...2	Size 3	Size 4	Size 5	Size 6...9
	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Reset Buttons (Each Kit Contains One Reset)					
Type 1, 3R/12 Bulletin 506...507 — One Kit Required Per Starter Bulletin 512...513 — One Kit Required Per Starter Bulletin 522...523 — Two Kits Required Per Starter	1493-N21	1493-N21	1493-N31*‡	— 1493-N21 ▶	—
Type 4/4X	—	—	1493-N32	—	—
Pneumatic Timer Mounting Plate Adapter (For Mtg. Bulletin 849A Timer) Bulletin 509 and 513 — Unilock♣	1401-N4	—	—	—	—

* Converts combination starter enclosure **F** to enclosure code **D** or **J** with door safety hardware.

‡ Standard on bolted Type 3R, 7 & 9.

§ The breather-drain combination can be in enclosure top as a breather or bottom as a drain. Specify (2) when both functions are required.






♣ Unilock suitable for Types 7 & 9 or Types 3R, 7 & 9 with the addition of a drain or a breather and drain.

▶ For Bulletins 512...513 only.

*‡Also use for NEMA sizes 0...2 lift-off enclosure.

System Accessories

For use on Bulletins 500, 500F, 500L, 500LP, 502, 502L, 503, 503L, 505, 505V, 506, 506X, 507, 507X, 509, 512, 512H, 512M, 512V, 513, 513H, 513M, 513V, 520, 520V, 522, 523, 530, 532, 533, 540, 542, 543, 570, 572, 573, 1242, 1243, 1272, 1273, 1282, 1283, 1232X, 1232V, 1233X, and 1233V

Description	Enclosure Type	NEMA Size	Cat. No.	
 <p>Power Monitor Kit* 3-phase, 240V AC — (Time Mark Model A258)</p>	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	599-PM1	
			3-phase, 480V AC — (Time Mark Model A258B)	599-PM2
 <p>Terminal Block* Panel Mount (6 point)‡</p>	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	1492-HC6	
 <p>Timing Relays* 120V AC, ON-Delay — 8-pin socket (Cat. No. 700-HN125) required 0.1...10 s</p>	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	700-HT12AU120	
			120V AC, ON-Delay — 8-pin socket (Cat. No. 700-HN125) required 1.0...180 s	700-HT12BU120
	120V AC, OFF-Delay — 11-pin socket (Cat. No. 700-HN126) required 0.1...10 s	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	700-HT22AU120
	120V AC, OFF-Delay — 11-pin socket (Cat. No. 700-HN126) required 1.0...180 s	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	700-HT22BU120
 <p>Control Relays* DPDT 2-pole 2 Form C Single AgNi Contact</p>	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	700-HA32A1	
	3PDT 3-pole 3 Form C Single AgNi Contact	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	700-HA33A1
 <p>Relay Sockets* 8-pin socket</p>	1 (hinged), 3R, 3R/4/12, 4/4X (stainless)	0...7	700-HN125	
		11-pin socket	0...7	700-HN126

* For combination starters only.

* 3-phase power monitor kit includes the time mark phase monitor and socket.

‡ Up to two 6-point terminal blocks may be added to each combination starter.



NEMA Specifications

NEMA Non-Combination and Combination Contactors/Starters

Electrical Ratings

NEMA Size	Load Voltage [V]	Continuous Current Rating [A]	Service Limit Current Rating [A]*	Maximum Hp Rating (Non-plugging and non-jogging duty)		Maximum Hp Rating (Plugging and jogging duty)*		Transformer Primary Switching kVa Rating (Inrush Current ≤ 20 times Continuous Current)		Transformer Primary Switching kVa Rating (Inrush Current = 20 to 40 times Continuous Current)		Capacitor Switching kVAR‡	Maximum Circuit Closing Inrush Current [A] Peak Including Offset
				1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	1Ø	3Ø		
				1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	1Ø	3Ø		
00	115	9	11	1/3	—	1/4	—	—	—	—	—	—	87
	200			—	1-1/2	—	1	—	—	—	—	—	
	230			1	1-1/2	1/2	1	—	—	—	—	—	
	380			—	1-1/2	—	1	—	—	—	—	—	
	460			—	2	—	1-1/2	—	—	—	—	—	
	575			—	2	—	1-1/2	—	—	—	—	—	
0	115	18	21	1	—	1/2	—	0.6	—	0.3	—	—	140
	200			—	3	—	1-1/2	—	1.8	—	0.9	—	
	230			2	3	1	1-1/2	1.2	2.1	0.6	1	—	
	380			—	5	—	1-1/2	—	—	—	—	—	
	460			—	5	—	2	2.4	4.2	1.2	2.1	—	
	575			—	5	—	2	3	5.2	1.5	2.6	—	
1	115	27	32	2	—	1	—	1.2	—	0.6	—	—	288
	200			—	7-1/2	—	3	—	3.6	—	1.8	—	
	230			3	7-1/2	2	3	2.4	4.3	1.2	2.1	6	
	380			—	10	—	5	—	—	—	—	—	
	460			—	10	—	5	4.9	8.5	2.5	4.3	13.5	
	575			—	10	—	5	6.2	11	3.1	5.3	17	
1P	115	36	42	3	—	1-1/2	—	—	—	—	—	—	—
	230			5	—	3	—	—	—	—	—	—	—
2	115	45	52	3	—	2	—	2.1	—	1	—	—	483
	200			—	10	—	7-1/2	—	6.3	—	3.1	—	
	230			7-1/2	15	5	10	4.1	7.2	2.1	3.6	12	
	380			—	25	—	15	—	—	—	—	—	
	460			—	25	—	15	8.3	14	4.2	7.2	25	
	575			—	25	—	15	10	18	5.2	8.9	31	
3	115	90	104	7-1/2	—	7-1/2	—	4.1	—	2	—	—	947
	200			—	25	—	15	—	12	—	6.1	—	
	230			15	30	15	20	8.1	14	4.1	7.0	27	
	380			—	50	—	30	—	—	—	—	—	
	460			—	50	—	30	16	28	8.1	14	53	
	575			—	50	—	30	20	35	10	18	67	
4	115	135	156	—	—	—	—	6.8	—	3.4	—	—	1581
	200			—	40	—	25	—	20	—	10	—	
	230			—	50	—	30	14	23	6.8	12	40	
	380			—	75	—	50	—	—	—	—	—	
	460			—	100	—	60	27	47	14	23	80	
	575			—	100	—	60	34	59	17	29	100	
5	115	270	311	—	—	—	—	14	—	6.8	—	—	3163
	200			—	75	—	60	—	41	—	20	—	
	230			—	100	—	75	27	47	14	24	80	
	380			—	150	—	125	—	—	—	—	—	
	460			—	200	—	150	54	94	27	47	160	
	575			—	200	—	150	68	117	34	59	200	
6	115	540	621	—	—	—	—	27	—	14	—	—	6326
	200			—	150	—	125	—	81	—	41	—	
	230			—	200	—	150	54	94	27	47	160	
	380			—	300	—	250	—	—	—	—	—	
	460			—	400	—	300	108	188	54	94	320	
	575			—	400	—	300	135	234	68	117	400	
7	230	810	932	—	300	—	—	—	—	—	—	240	9470
	460			—	600	—	—	—	—	—	—	480	
	575			—	600	—	—	—	—	—	—	600	
8	230	1215	1400	—	450	—	—	—	—	—	—	360	14205
	460			—	900	—	—	—	—	—	—	720	
	575			—	900	—	—	—	—	—	—	900	
9	230	2250	2590	—	800	—	—	—	—	—	—	665	25380
	460			—	1600	—	—	—	—	—	—	1325	
	575			—	1600	—	—	—	—	—	—	1670	

* **Service-Limit Current Ratings** — The service-limit current ratings shown represent the maximum rms current, in amperes, which the controller shall be permitted to carry for protracted periods in normal service. At service-limit current ratings, temperature rises shall be permitted to exceed those obtained by testing the controller at its continuous current rating. The current rating of overload relays or the trip current of other motor protective devices used shall not exceed the service-limit current rating of the controller.

* **Plugging or Jogging Service** — The listed horsepower ratings are recommended for those applications requiring repeated interruption of stalled motor current encountered in rapid motor reversal in excess of five openings or closings per minute and shall not be more than ten in a ten minute period.

‡ If maximum available current (at capacitor terminals) is greater than 3000 A, please contact your local Rockwell Automation sales office, Allen-Bradley distributor, or NEMA ICS-2 Standard.



Mechanical Ratings

NEMA Size	Mechanical Life (Millions of Operations)	Maximum Number of Auxiliary Contacts	Operating Time [ms]	
			Pick-up (Average)	Drop-out (Average)
00	10	5	20	16
0	10	8	21	16
1	10	8	22	14
2	10	8	27	13
3	5	8	37	20
4	5	8	27	20
5	5	8	25	18
6	5	4	25...79	10...22
7	—	8	88	40
8	—	8	88	45
9	—	8	118	84



Construction

NEMA Size	Wire Size for Power Terminals	Required Torque on Power Terminal Wire Clamps and Pressure Connectors or Lugs	Type of Power Terminal	Contact Material		Requirements for Sizing of Wire		
				Power Contacts	Auxiliary Contacts			
00	#16...10 AWG	9 lb•in	Pressure terminals	Silver alloy	Silver	All wire rated 167 °F (75 °C) or higher must be sized per the local Electrical Code for 167°F (75 °C) wire.		
0	#14...10 AWG	20 lb•in	Saddle or wire clamps					
1	#14...8 AWG	20 lb•in						
2	#14...4 AWG	45 lb•in	Pressure terminals					
3	#8...1/0 AWG	150 lb•in						
4	#6...4/0 AWG	275 lb•in						
5	#4 AWG...500 MCM	375 lb•in						
6	Lugs sold separately. See page 1-113.							
7								
8								
9	Direct bus connections only.							

Environmental

NEMA Size	Operating Position	Operating Temperature Range	Altitude	Corrosion-Resistance
00	Horizontal	Starters with eutectic alloy Overload relay -13...+149 °F (-25...+65 °C) Starters with SMP Overload relay -13...+131 °F (-25...+55 °C) (provided condensation is prevented)	10 000 feet before derating	All metal parts are treated for corrosion-resistance
0	Vertical			
1				
2				
3				
4				
5	Horizontal			
6				
7				
8				
9				

Short Circuit Rating

Combination contactors and starters with disconnect switch: Bulletin 502, 506, 512, 522E, 522F, 522G, and 1232X

Combination Contactors and Starters with Disconnect Switch: Bulletin 502, 506, 512, 522E, 522F, 522G, and 1232X			
NEMA Size	Fuse Type	Available Short Circuit Amperes RMS Symmetrical [A]	Maximum Voltage [V]
0...3	H, K	5000	600
4...5	H, K	10 000	
0...5	J, R	100 000	
6	L	18 000	
7	L	18 000	
Combination Lighting Contactors with Disconnect Switch: Bulletin 502L			
Lighting Contactor Rating [A]	Fuse Type	Available Short Circuit Amperes RMS Symmetrical [A]	Maximum Voltage [V]
20...100	H, K	5000	600
200...300	H, K	10 000	
20...300	J, R	100 000	
Combination Contactors and Starters with Circuit Breaker: Bulletin 503, 507, 513, 523E, 523F, 523G, and 1233X*			
Enclosure Type	NEMA Size	Available Short Circuit Amperes RMS Symmetrical [A]	Maximum Voltage [V]
1, 3R, 3R/4/12, 4/4X (stainless)	0...5	65 000	480
Unilock 3R, 7, & 9	0...5	65 000	
Bolted 3R, 7, & 9	0...2	65 000	
1, 3R, 3R/4/12, 4/4X (stainless)	0...5	25 000	600
Unilock 3R, 7, & 9	0...3	5000	
Unilock 3R, 7, & 9	4...5	10 000	
Bolted 3R, 7, & 9	0...2	5000	
3R, 3R/4/12	6...7	10 000	
Combination Lighting Contactors with Circuit Breaker: Bulletin 503L*			
Enclosure Type	Lighting Contactor Rating [A]	Available Short Circuit Amperes RMS Symmetrical [A]	Maximum Voltage [V]
1, 3R, 3R/4/12, 4/4X (stainless)	20...300	65 000	480
Unilock 3R, 7, & 9	20...300	65 000	
Bolted 3R, 7, & 9	20...300	65 000	
1, 3R, 3R/4/12, 4/4X (stainless)	20...300	25 000	600
Unilock 3R, 7, & 9	20...100	5000	
Unilock 3R, 7, & 9	20...300	10 000	
Bolted 3R, 7, & 9	20...300	5000	

* For the most up-to-date SCCRs, please see the on-line Industrial Controls catalog at www.ab.com/catalogs.

AC Coil Data

NEMA Size	Operating Volt Amperes Burden [VA]		Heat Dissipation [W]	Coil Operating Limits
	60 Hz Coils			
	Inrush	Sealed		
00	70	8	2.7	85...110%
0	192	29	5.9	
1 & 1P	192	29	5.9	
2 (2...3 poles)	240	29	5.9	
2 (4...5 poles)	315	38	5.9	
3 (2...3 poles)	660	45	10	
3 (4...5 poles)	840	58	10	
4 (2...3 poles)	1225	69	14.8	
4 (4...5 poles)	1490	96	14.8	
5 (Series L)	1490	96	19.8	
6*	4860	254	65.7	
6 (Interposing relay)	52.44	3.96	—	
7*	Economized DC Coil		—	
7 (Interposing relay)	74.40	9.84	—	
8†	Economized DC Coil		—	
8 (Interposing relay)	74.40	9.84	—	
9§	Economized DC Coil		—	
9 (Interposing relay)	144	19.20	—	

* This rating is for the size 6 contactor coil only. All starters are shipped with an interposing relay as standard.

‡ Size 7 starters are shipped with a 250 VA control circuit transformer and an interposing relay with a 120V coil. Voltage is then rectified to DC for the contactor coil.

† Size 8 starters are shipped with a 350 VA control circuit transformer and an interposing relay with a 120V coil. Voltage is then rectified to DC for the contactor coil.

§ Size 9 starters are shipped with a 750 VA control circuit transformer and an interposing relay with a 120V coil. Voltage is then rectified to DC for the contactor coil.

Auxiliary Contacts (NEMA A600 and P300) — Bulletin 595, 596

Maximum AC Contact Rating Per Pole						
AC Rating Designation	Maximum Voltage 60 or 50 Hz	[A]		Continuous Carrying Current [A]	[VA]	
		Make	Break		Make	Break
A600	120	60	6	10	7200	720
	240	30	3	10	7200	720
	480	15	1.5	10	7200	720
	600	12	1.2	10	7200	720
Maximum DC Contact Rating Per Pole for 595, 596 Auxiliary Contacts (Maximum Continuous Carrying Current is 5 A)						
DC Rating Designation	125V DC		250V DC		600V DC	
P300	0.55 A		0.55 A (Requires 2 Contacts in Series)		—	
	1.1 A (Requires 2 Contacts in Series)					

