

## DESCRIPTION

Cambria 203 is a small, low voltage dimmable LED and halogen MR16 luminaire. It is available with a fully adjustable side swivel stem (203, 203-FL), an adjustable center rear swivel (203-CRS) or a stationary rear flush mount (203-FM). Side swivel models 203 and 203-FL provide 340° tilt and 360° rotation. Center rear swivel model CRS provides 200° tilt and 360° rotation. Center rear swivel model CRS provides 200° tilt and 360° rotation. Various lenses, louvers and color or dichroic filters can be combined - up to three at once - to create multiple lighting effects. The Lumière exclusive Siphon Protection System (S.P.S.) prevents water from siphoning into the fixture through its own lead wires.

## SPECIFICATION FEATURES

### Material

Housing, hood and mounting stem are precision-machined from corrosion-resistant billet stock 6061-T6 aluminum, C360 brass, C932 bronze, C110 copper or 303/304 stainless steel.

### Finish

Fixtures constructed from 6061-T6 aluminum are double protected by an ROHS compliant chemical film undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment. A variety of standard colors are available.

### Brass, Bronze, Copper or Stainless Steel

Fixtures constructed from brass, bronze, copper or stainless steel are left unpainted to reveal the natural beauty of the material. Brass, bronze and copper will patina naturally over time.

### Hood

Hood is removable for easy relamping and accepts up to three internal accessories at once (lenses, louvers, filters) to achieve multiple lighting effects. Model 203, 203-CRS & 203-FM: Weep holes prevent water and mineral stains from collecting on the lens, even in the straight-up position. Model 203-FL: The flush lens design reduces fixture length, minimizes debris collection and prevents water and mineral stains from collecting on the lens.

### Gasket

Housing and hood are sealed with a high temperature silicone o-ring gasket to prevent water intrusion.

### Lens

Tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock.

<b>Catalog #</b>		<b>Type</b>
<b>Project</b>		
<b>Comments</b>		<b>Date</b>
<b>Prepared by</b>		

### Mounting Stem

Model 203 and 203-FL include fully adjustable side-mounted swivel stem, providing 340° tilt and 360° rotation for easy aiming. Center rear swivel (203-CRS) or stationary rear flush mount (203-FM) models are also available. All models include 1/2" NPS threaded male fitting. Stainless steel aim-locking mechanisms are standard (not available on 203-FM). Lumière's exclusive Siphon Protection System (S.P.S.) prevents water from siphoning into the fixture through its own lead wires.

### Hardware

Stainless steel hardware is standard to provide maximum corrosion-resistance.

### Socket

Ceramic socket with 250° C Teflon® coated lead wires and GU5.3 bi-pin base.

### Electrical

Remote 12V transformer required (not included). NOTE: initial power draw on LED equipped fixtures is 15 watts. When sizing transformer use 15 watts per LED fixture. Nominal power draw after start up is 6 watts or 10 watts accordingly. Also, LEDs are more voltage sensitive than standard halogen MR16 lamps. The LED module is designed to operate between 10 and 13 volts. Any less or more voltage can cause premature failures.


### Lamp

Halogen lamp not included. LED modules are included and are available in four color temperatures (2700, 3000, 4000, and 5700) and three distributions (spot, narrow, and flood). Both color temperature and distribution must be specified when ordering. Sora lamp compatible (10W Max).



## 203 CAMBRIA LED HALOGEN

**APPLICATIONS:  
ACCENT / FLOOD**

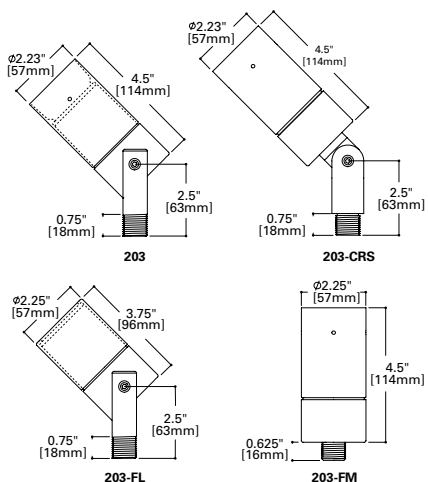

**CERTIFICATION DATA**  
UL and cUL Wet Location Listed  
LM79 / LM80 Compliant  
ROHS Compliant  
IP65 Ingressed Protection Rated

**TECHNICAL DATA**  
6W LED, L70/60,000 hours at 25°C  
10W LED, L70/60,000 hours at 25°C  
Low Voltage: 50W Halogen MR16

## ORDERING INFORMATION


Sample Number: 203-FL-50MR16-12-NSS

Series	Construction	Source (for LED, select from each column and combine)	Voltage	Finish
203=LED of MR16 Cambria Accent Fixture	___=Standard Side Swivel Stem, 1/2" NPS CRS=Center Rear Swivel Stem, 1/2" NPS FM=Rear Flush Mount, 1/2" NPS FL=Flush Lens, Side Swivel Stem, 1/2" NPS	50MR16=50W max. Halogen MR16 (lamp not included)	12=12V	<b>Painted</b> BK=Black BZ=Bronze CS=City Silver VE=Verde WT=White <b>Premium Finish</b> NBR=Natural Brass NCP=Natural Copper NBZ=Natural Bronze NSS=Natural Stainless Steel
		6LED=6W LED      27=2700K      12=12° Spot 10LED=10W LED    30=3000K      21=21° Narrow 40=4000K      41=41° Wide 57=5700K		
		4LED=4W LED      AM=Amber 7LED=7W LED      (585-595nm)		

**OPTICAL ACCESSORIES - ORDER SEPARATELY**

Filters (2.00" Diameter)	Optical Lenses (2.00" Diameter)	Optical Louvers (2.00" Diameter)
<b>F71</b> = Peach Dichroic <b>F72</b> = Amber Dichroic <b>F73</b> = Green Dichroic <b>F74</b> = Medium Blue <b>F75</b> = Yellow Dichroic <b>F76</b> = Red Dichroic <b>F77</b> = Dark Blue Dichroic <b>F78</b> = Light Blue Dichroic <b>F79</b> = Neutral Density Dichroic <b>F80</b> = Magenta Dichroic <b>F22</b> = Red Color <b>F33</b> = Blue Color <b>F44</b> = Green Color <b>F55</b> = Yellow Color <b>F66</b> = Mercury Vapor	<b>LSL</b> =Linear Spread Lens (elongates standard beam spread) <b>DIF</b> =Diffused Lens (provides even illumination) <b>OSL</b> =Overall Spread Lens (increases standard beam spread)	<b>LVR</b> =45° Hex Cell Louver (reduces glare)

**LAMP OR LED MODULE PLACEMENT**

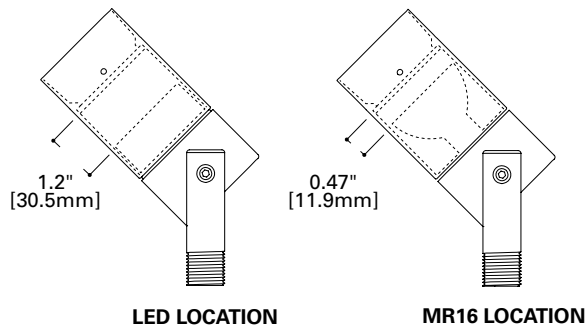


**MOUNTING ACCESSORIES - ORDER SEPARATELY**

Ground Mounting
<b>GS01</b> = 1-1/2" x 6-3/4" (38mm x 171mm) cast zinc ground spike. <b>GS03</b> = 2-3/8" x 6-5/8" 960mm x 168mm) aluminum ground spike with integral 12V wiring compartment. Specify powder paint finish (BK,BZ,CS,VE,WT) <b>GS04</b> = 1" x 16-1/2" (25mm x 419mm) aluminum ground spike with integral 12V wiring compartment. Specify powder paint finish (BK,BZ,CS,VE,WT) <b>GS05</b> = 1" x 16-1/2" (48mm x 438mm) black polycarbonate ground spike with 2"-13" height adjustment - requires fixture with extended stem. <b>GS06</b> = 2" x 10-1/2" ( 51mm x 267mm) plate steel/brass spiral ground spike. <b>GS08</b> = 1-7/8" x 8" (48mm x 203mm) black ABS ground spike. <b>GS13</b> = 3-3/4" x 4-1/2" (95mm x 114mm) brass/stainless steel 3 prong ground spike.
Surface / Wall Mounting - specify powder paint finish (BK,BZ,CS,VE,WT)
<b>FS1</b> = 2-7/8" x 4-5/8" (73mm x 117mm) rectangular wall plate or box cover with single 1/2 NPS mounting hole. <b>FS2</b> = 2-7/8" x 4-5/8" (73mm x 117mm) rectangular wall plate or box cover with dual 1/2 NPS mounting holes. <b>RS1</b> = 4-1/2" (144mm) machined aluminum standard round wall plate with single 1/2 NPS mounting hole. <b>RS2</b> = 4-1/2" (114mm) machined aluminum standard round wall plate with single 1/2 NPS mounting hole. <b>TM01</b> = 2-3/16" x 1-1/2" (71mm x 38mm) round mount for installation on trees or other wood surfaces with 1/2 NPS mounting hole. <b>TM05</b> = 3-7/8" x 2" (98mm x 51mm) rectangular tree/surface mount with wiring compartment and single 1/2 NPS mounting hole.
Low Voltage Tree Mounting - specify finish (BK,BZ,CS,VE,WT)
<b>TM04</b> = 2-1/2" x 4-1/4" (64mm x 108mm) expanding tree strap with self adjusting tension release for one fixture mount. Designed for a maximum tree diameter of 24" (610mm). <b>TM04-2</b> = two fixture mount. <b>TM04-3</b> = three fixture mount. <b>TM04-4</b> = four fixture mount. <b>TR07</b> = tree friendly ring with adjustable stand-offs. Accommodates 18"-24" (457mm - 610mm) tree diameter. <b>TR07-2</b> = two fixture mount. <b>TR07-3</b> = three fixture mount. <b>TR07-4</b> = four fixture mount. <b>TR07-6</b> = six fixture mount.

**CAMBRIA 203 MR16 HALOGEN PHOTOMETRY DATA**

**Horizontal Illuminance on Surface - Cambria 203 Standard Recessed Hood - 50W MR16**



Filename	203-50MR16-12-BK-NSP.ies	
Lamp	50W MR16 NSP	
CBCP	11,000	
Distance	FC	Beam Diameter
2'	2550	1'6"
4'	638	1'0"
6'	283	1'6"
8'	159	2'0"
10'	102	3'0"
15'	45	4'0"

Filename	203-50MR16-12-BK-NFL.ies	
Lamp	50W MR16 NFL	
CBCP	3,200	
Distance	FC	Beam Diameter
2'	725	1'0"
4'	181	2'6"
6'	81	4'0"
8'	45	5'0"
10'	29	6'6"
15'	13	10'0"

**CCT MULTIPLIER TABLE**

LAMP WATTAGE	MULTIPLIER
20W	0.32
35W	0.57

Filename	203-50MR16-12-BK-FL.ies	
Lamp	50W MR16 FL	
CBCP	2,000	
Distance	FC	Beam Diameter
2'	431	1'6"
4'	106	3'0"
6'	48	5'0"
8'	27	6'6"
10'	17	8'0"
15'	7	12'0"

Filename	203-50MR16-12-BK-WFL.ies	
Lamp	50W MR16 WFL	
CBCP	1,200	
Distance	FC	Beam Diameter
2'	269	2'0"
4'	67	4'6"
6'	30	7'6"
8'	17	9'0"
10'	11	11'6"
15'	5	17'0"

**NOTES AND FORMULAS**


- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.
- Bare lamp data shown. Consult lamp manufacturers to obtain detailed specifications for their lamps.

**CAMBRIA 203 LED PHOTOMETRY DATA**

**LED Lumen and CBCP Table - 4000K**

OPTIC TYPE (beam spread)	BASE + ACCESSORY OPTIONS	4000K CCT - Standard Hood						4000K CCT - Flush Hood (FL option)					
		10W			6W			10W			6W		
		CBCP	LUMENS	LPW	CBCP	LUMENS	LPW	CBCP	LUMENS	LPW	CBCP	LUMENS	LPW
12'	BASE	7931	419	45	5948	314	53	8049	418	44	6037	314	53
	+ DIF (DIFFUSE)	1178	289	31	884	217	37	1188	336	36	891	252	43
	+ OSL (OVERALL SPREAD LENS)	820	350	38	615	263	45	886	368	40	665	276	47
	+ LSL (LINEAR SPREAD LENS)	NA	343	36	NA	257	44	NA	378	41	NA	284	48
	+ LVR (HEXCELL LOUVER)	7165	339	36	5374	254	43	6799	332	35	5099	249	42
21'	BASE	2194	344	37	1646	258	44	2129	370	40	1597	278	47
	+ DIF (DIFFUSE)	683	241	26	512	181	31	648	300	33	486	225	38
	+ OSL (OVERALL SPREAD LENS)	595	290	32	446	218	37	596	337	37	447	253	43
	+ LSL (LINEAR SPREAD LENS)	NA	282	31	NA	212	36	NA	329	36	NA	247	42
	+ LVR (HEXCELL LOUVER)	2030	249	27	1523	187	32	2007	268	29	1505	201	34
41'	BASE	1173	304	33	880	228	39	1169	361	39	877	271	46
	+ DIF (DIFFUSE)	418	205	22	314	154	26	410	278	30	308	209	36
	+ OSL (OVERALL SPREAD LENS)	595	250	27	446	188	32	509	318	35	382	239	41
	+ LSL (LINEAR SPREAD LENS)	NA	245	27	NA	184	31	NA	315	34	NA	236	40
	+ LVR (HEXCELL LOUVER)	1078	195	21	809	146	25	1004	213	23	753	160	27

**Horizontal Illuminance on Surface - Cambria 203 Standard Recessed Hood -4000K**

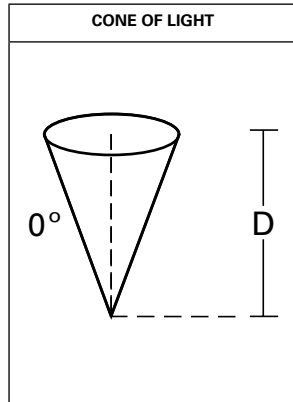

Filename: 203-10LED4012-12-BK.IES			
Test No.: P184445			
Distance	FC	Beam Diameter	
2'	1912.8	0.4'	
4'	478.2	0.8'	
6'	212.5	1.2'	
8'	119.5	1.6'	
10'	76.5	2.0'	
15'	34.0	3.2'	
20'	19.1	4.2'	
30'	8.5	6.4'	
40'	4.8	8.4'	

Filename: 203-10LED4021-12-BK.IES			
Test No.: P185195			
Distance	FC	Beam Diameter	
2'	548.5	0.6'	
4'	137.1	1.3'	
6'	60.9	2.1'	
8'	34.3	2.8'	
10'	21.9	3.6'	
15'	9.8	5.3'	
20'	5.5	7.2'	
30'	2.4	10.6'	
40'	1.4	13.9'	

Filename: 203-10LED4041-12-BK.IES			
Test No.: P185945			
Distance	FC	Beam Diameter	
2'	290.7	0.8'	
4'	72.7	1.6'	
6'	32.3	2.5'	
8'	18.2	3.3'	
10'	11.6	4.2'	
15'	5.2	6.4'	
20'	2.9	8.5'	
30'	1.3	12.6'	
40'	0.7	16.2'	

**CCT MULTIPLIER TABLE**

CCT(K) / COLOR	MULTIPLIER
2700K	0.79
3000K	0.86
4000K	1.00
5700K	1.05
AMBER	0.57

Note: Multiplier can be used to calculate center beam candle power (CBCP), Lumens and footcandle (FC) values.

**Horizontal Illuminance on Surface - Cambria 203 Flush Lens Hood - 4000K**

Filename: 203-FL-10LED4012-12-BK.IES			
Test No.: P186665			
Distance	FC	Beam Diameter	
2'	2012.2	0.4'	
4'	503.1	0.8'	
6'	223.6	1.2'	
8'	125.8	1.6'	
10'	80.5	2.0'	
15'	35.8	3.0'	
20'	20.1	4.0'	
30'	8.9	6.1'	
40'	5.0	8.1'	

Filename: 203-FL-10LED4021-12-BK.IES			
Test No.: P186915			
Distance	FC	Beam Diameter	
2'	532.2	0.6'	
4'	133.1	1.4'	
6'	59.1	2'	
8'	33.3	2.8'	
10'	21.3	3.4'	
15'	9.5	5.2'	
20'	5.3	7'	
30'	2.4	10.6'	
40'	1.3	14.2'	

Filename: 203-FL-10LED4041-12-BK.IES			
Test No.: P187165			
Distance	FC	Beam Diameter	
2'	289.9	0.8'	
4'	72.5	1.6'	
6'	32.2	2.5'	
8'	18.1	3.4'	
10'	11.6	4.2'	
15'	5.2	6.4'	
20'	2.9	8.5'	
30'	1.3	12.9'	
40'	0.7	17.2'	

**TECHNICAL INFORMATION**

1. Dimming is dependant on remote transformer compatibility with LED module. Please see [compatibility matrix](#) for dimmer switch and transformer selection.
2. When using a magnetic dimmer switch there are two recommended LED compatible 120V magnetic dimming switches:  
Lutron Ariadni AVLV-600P and Lutron Diva DVLV-600P
3. IMPORTANT: when sizing the transformer use 9 watts for 6LED or 15 watts for 10LED option fixture. Nominal power draw after start up is 6 watts or 10 watts accordingly. The LED module is designed to operate between 10 and 13 volts. Any less or more voltage can cause premature failures.