



# Décora Series In-Wall Timers

# 935 Series



# 93502 - 30 Minute Timer Shown

### RATINGS

INPUT: 125-277 VAC, 60 Hz

7A - 125 VAC	Tungsten
20A - 125VAC	Resistive
10A - 250VAC	Resistive
1 Hp - 250 VAC	Motor

### ORDERING INFORMATION

Part #	Description
93501	15 Minute
93502	30 Minute
93503	60 Minute
93504	2 Hour
93507	4 Hour
93505	6 Hour
93506	12 Hour
93513	60 Minute with hold
93516	12 Hour with hold

White & Ivory Decorator Dial & Knob Included

### WARRANTY

1 Year Limited Warranty

### OVERVIEW

The MarkTime® 935 Décora Series In-Wall Timers are interchangeable with any standard single or multi-gang wall switch. These energy saving timers use no electricity to operate and automatically limit the "ON" time of energy consuming loads.

### APPLICATIONS

The Décora Series in-Wall Timer switch is an easy upgrade from any single pole wall switch. The 935 Series can be used in a variety of residential and light commercial applications providing convenient timed control of lighting, fans, heaters, motors and other energy consuming loads.

### FEATURES & BENEFITS


- Versatile time limits allow for quick, simple operation while providing the most effective energy management.
- Select models have a convenient hold feature to override automatic shutoff.
- Combined N.O. and N.C. switching configurations give the convenience and versatility of either typical operation; turning a load on during time delay or reverse operation of turning the load off during time delay.
- Switching Convenience - SPST switching with the option to be wired for SPDT.
- No neutral required – great for retrofits, saves time and money.
- White & ivory decorator dials & knobs included so you carry 1 SKU VS. 2; saving counter space & inventory cost.
- Supplied decorator dials can be installed with either standard or decorator wall plates.
- Fits single or multi-gang wall box to replace a single-pole wall switch for fast easy installation.

**Caution: Not to be used in precision timing applications where inaccurate timing could have dangerous consequences. (i.e. sun lamp, tanning beds etc.) Do not use with fluorescent lamp ballasts.**




# 935 Series Décora Series In-Wall Timers

## INSTALLATION

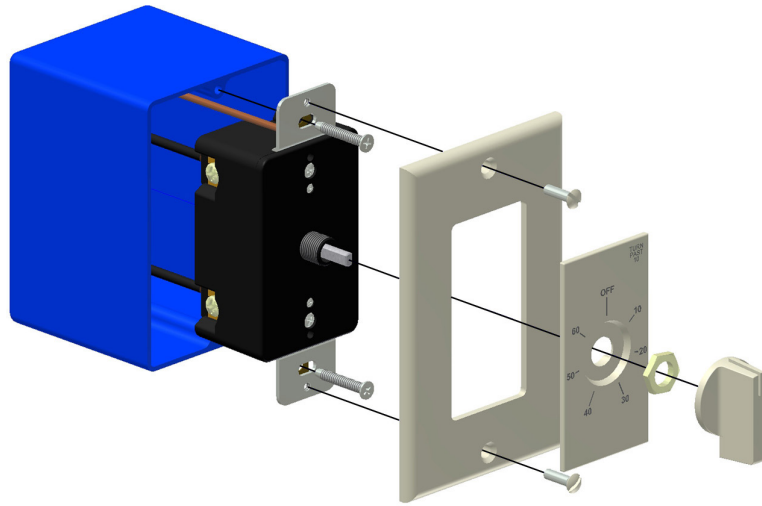

## WIRING DIAGRAMS

### TYPICAL WIRING

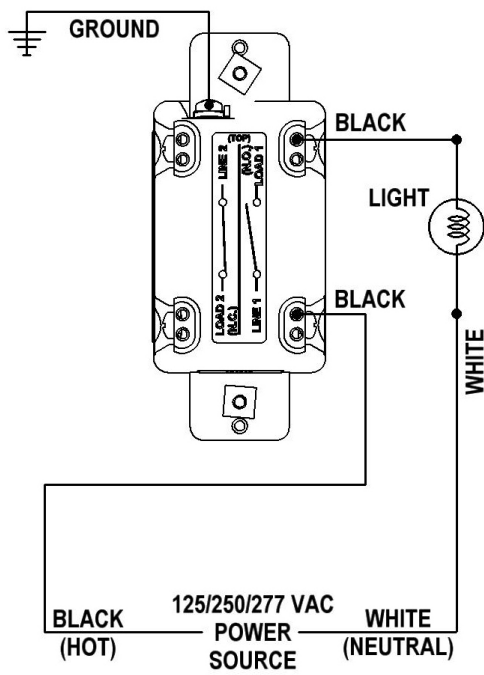

### REVERSE OPERATION

