

Schedule 80 PVC Rigid Nonmetallic Conduit (RNC) (Extra Heavy Wall EPC-80)



RUS Listed

Listed for use in aboveground and belowground applications that are subject to physical damage.

- Sunlight resistant • Rated for use with 90°C conductors • Superior weathering characteristics
- For use in areas subject to physical damage

With Integral Bell*



Schedule 80 Extra Heavy Wall

Part No.			Std. Crate Qty. Wt. Per			Dimensions		
10'	20'	Nom. Size	10'	20'	100'	O.D.	I.D.	Wall
49405-010	49405-020	1/2"	6000'	12000'	21	.840	.546	.147
49407-010	49407-020	3/4"	4400'	8000'	30	1.050	.742	.154
49408-010	49408-020	1"	3600'	7200'	44	1.315	.957	.179
49409-010	49409-020	1 1/4"	3300'	6600'	60	1.660	1.278	.191
49410-010	49410-020	1 1/2"	2250'	3600'	72	1.900	1.500	.200
49411-010	49411-020	2"	1400'	2800'	101	2.375	1.939	.218
49412-010	49412-020	2 1/2"	930'	1880'	154	2.875	2.323	.276
49413-010	49413-020	3"	880'	1760'	210	3.500	2.900	.300
49415-010	49415-020	4"	570'	1140'	308	4.500	3.826	.337
49416-010	—	5"	380'	—	428	5.563	4.813	.375
49417-010	49417-020	6"	260'	520'	588	6.625	5.761	4.32

Rigid nonmetallic conduit is normally supplied in standard 10' lengths, with one belled end per length. For specific requirements, it may be produced in lengths shorter or longer than 10', with or without belled ends.

Use RNC Fittings with Schedule 40 and Schedule 80 Conduit.

- Notes: 1. Special fittings and conduit sizes will be quoted on request.
2. DON'T FORGET TO ORDER CEMENT.
3. Carlon reserves the right to ship to the nearest unitized quantity.

Support of Carlon Rigid Nonmetallic Conduit in Aboveground Installations


Table 352.30(B) NEC shows the support requirements for Schedule 40 and Schedule 80 rigid PVC nonmetallic conduit.

Plastic conduit should always be installed away from steam lines, etc. Support straps should allow for lineal movement caused by expansion and contraction.

Maximum ambient temperature is 122°F (50°C).

Table 352.30(B), NEC

Trade Size	Maximum Spacing Between Supports (feet)
1/2 - 1	3
1 1/4 - 2	5
2 1/2 - 3	6
3 1/2 - 5	7
6	8

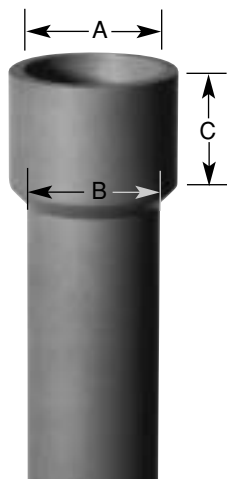

Acceptable Dimensions in Inches of Integral Bell per UL 651

Trade Size	A		B		C
	At Entrance (in.)	Minimum	At Bottom (in.)	Minimum	
1/2	0.860	0.844	0.844	0.828	1.375
3/4	1.074	1.054	1.056	1.036	1.500
1	1.340	1.320	1.320	1.300	1.750
1 1/4	1.689	1.665	1.667	1.643	1.875
1 1/2	1.930	1.906	1.906	1.882	2.750
2	2.405	2.381	2.381	2.357	3.250
2 1/2	2.905	2.875	2.883	2.853	3.250
3	3.530	3.500	3.507	3.477	3.875
3 1/2	4.065	3.965	4.007	3.977	3.875
4	4.565	4.465	4.506	4.476	4.625
5	5.643	5.543	5.583	5.523	5.625
6	6.708	6.608	6.644	6.584	6.375