

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index




Fork Terminal, Nylon Insulated

Type PN-F

- Fork design provides for fast and easy installation, without the need to remove fastener
- Metal insulation grip sleeve crimps to wire insulation, providing protection to the crimp joint during high vibration applications

- Internal barrel serrations assure good wire contact and maximum tensile strength
- UL Flammability UL 94V-2/HB, maximum insulation temperature 221°F (105°C)
- UL and CSA rated up to 600 V per UL 486A/B

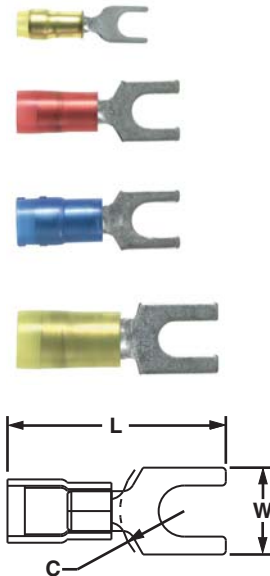

Part Number	Wire Range	Color Code	Stock Thickness (In.)	Max. Ins. (In.)	Stud Size	Figure Dimensions (In.)			Recommended Installation Tool	Std. Pkg. Qty.**	Std. Ctn. Qty.
						L	W	C			
PN22-2F-C*	26 – 22 AWG	Yellow	0.02	0.090	#2	0.66	0.20	0.19	CT-600-A, CT-1525, CT-2500	100	1000
PN22-4F-C*			0.02	0.090	#4	0.67	0.20	0.21			
PN22-6F-C*			0.02	0.090	#6	0.77	0.25	0.26			
PN18-6FN-C*	22 – 18 AWG	Red	0.03	0.145	#6	0.78	0.24	0.20	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
PN18-6F-C			0.03	0.145	#6	0.78	0.30	0.20			
PN18-8F-C			0.03	0.145	#8	0.85	0.32	0.23			
PN18-10FN-C*			0.03	0.145	#10	0.86	0.31	0.25			
PN18-10F-C			0.03	0.145	#10	0.86	0.35	0.25			
PN18-14F-C			0.03	0.145	1/4"	1.03	0.44	0.33			
PN14-6FN-C*	18 – 14 AWG	Blue	0.03	0.162	#6	0.79	0.24	0.19	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
PN14-6F-C			0.03	0.162	#6	0.79	0.28	0.19			
PN14-8F-C			0.03	0.162	#8	0.85	0.31	0.23			
PN14-10FN-C*			0.03	0.162	#10	0.87	0.31	0.24			
PN14-10F-C			0.03	0.162	#10	0.87	0.34	0.24			
PN14-14F-C			0.03	0.162	1/4"	1.02	0.44	0.32			
PN10-6F-L	12 – 10 AWG	Yellow	0.04	0.225	#6	1.00	0.31	0.22	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	50	500
PN10-8F-L			0.04	0.225	#8	1.03	0.37	0.22			
PN10-10F-L			0.04	0.225	#10	1.04	0.37	0.22			
PN10-14F-L			0.04	0.225	1/4"	1.14	0.49	0.30			

*Not UL Listed or CSA Certified.

**Bulk packaging may be available, contact Panduit Customer Service for additional information.

‡UL and CSA approved tooling/product combinations. For crimping tool information, see pages D1.83, D1.84, D1.86 and D1.88.




Fork Terminal, Nylon Insulated – Funnel Entry

Type PNF-F

- Fork design provides for fast and easy installation, without the need to remove fastener
- Metal insulation grip sleeve crimps to wire insulation, providing protection to the crimp joint during high vibration applications

- Internal barrel serrations assure good wire contact and maximum tensile strength
- UL Flammability UL 94V-2/HB, maximum insulation temperature 221°F (105°C)
- UL and CSA rated up to 600 V per UL 486A/B

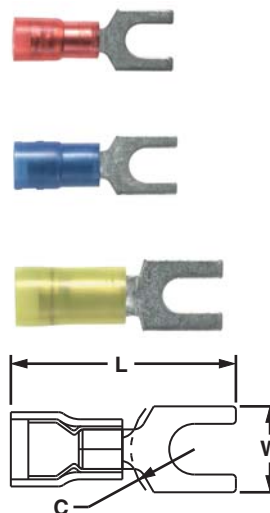

Part Number	Wire Range	Color Code	Stock Thickness (In.)	Max. Ins. (In.)	Stud Size	Figure Dimensions (In.)			Recommended Installation Tool	Std. Pkg. Qty.**	Std. Ctn. Qty.
						L	W	C			
PNF18-6F-C	22 – 18 AWG	Red	0.03	0.136	#6	0.80	0.30	0.22	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
PNF18-8F-C			0.03	0.136	#8	0.86	0.31	0.25			
PNF18-10F-C			0.03	0.136	#10	0.87	0.34	0.26			
PNF18-14F-C			0.03	0.136	1/4"	1.05	0.44	0.35			
PNF14-6F-C	16 – 14 AWG	Blue	0.03	0.162	#6	0.80	0.28	0.22	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
PNF14-8F-C			0.03	0.162	#8	0.85	0.31	0.25			
PNF14-10F-C			0.03	0.162	#10	0.87	0.34	0.26			
PNF14-14F-C			0.03	0.162	1/4"	1.05	0.44	0.35			
PNF10-6F-L	12 – 10 AWG	Yellow	0.04	0.225	#6	1.01	0.31	0.24	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	50	500
PNF10-8F-L			0.04	0.225	#8	1.02	0.37	0.24			
PNF10-10F-L			0.04	0.225	#10	1.04	0.37	0.24			
PNF10-14F-L			0.04	0.225	1/4"	1.15	0.50	0.31			

**Bulk packaging may be available, contact Panduit Customer Service for additional information.

‡UL and CSA approved tooling/product combinations. For crimping tool information, see pages D1.83, D1.84, D1.86 and D1.88.

PANDUIT® ELECTRICAL SOLUTIONS

Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
PMV1-6FB-3K	D1.120	PN10-6SLF-L	D1.26	PN14-8SLF-C	D1.26
PMV1-6FB-CY	D1.35	PN10-8F-2K	D1.107	PN18-10F-3K	D1.107
PMV1-6RB-3K	D1.118	PN10-8F-L	D1.22	PN18-10F-C	D1.22
PMV1-6RB-CY	D1.34	PN10-8FF-2K	D1.113	PN18-10FF-3K	D1.113
PMV1-P10-CY	D1.60	PN10-8FF-L	D1.28	PN18-10FF-C	D1.28
PMV1-P12B-3K	D1.138	PN10-8LF-2K	D1.110	PN18-10FN-3K	D1.107
PMV2-35RB-3K	D1.118	PN10-8LF-L	D1.24	PN18-10FN-C	D1.22
PMV2-3FB-3K	D1.120	PN10-8R-2K	D1.103	PN18-10LF-3K	D1.110
PMV2-3FB-C	D1.35	PN10-8R-L	D1.6	PN18-10LF-C	D1.24
PMV2-3RB-3K	D1.118	PN10-8RX-L	D1.8	PN18-10LFN-C	D1.24
PMV2-3RB-C	D1.34	PN10-8SLF-2K	D1.112	PN18-10R-3K	D1.103
PMV2-4FB-3K	D1.120	PN10-8SLF-L	D1.26	PN18-10R-C	D1.6
PMV2-4FB-C	D1.35	PN12-10HDR-2K	D1.106	PN18-10SLF-3K	D1.112
PMV2-4RB-3K	D1.118	PN12-10HDR-L	D1.13	PN18-10SLF-C	D1.26
PMV2-4RB-C	D1.34	PN12-14HDR-2K	D1.106	PN18-12R-L	D1.6
PMV2-5FB-3K	D1.120	PN12-14HDR-L	D1.13	PN18-14F-3K	D1.107
PMV2-5FB-C	D1.35	PN12-38HDR-2K	D1.106	PN18-14F-C	D1.22
PMV2-5RB-3K	D1.118	PN12-38HDR-L	D1.13	PN18-14R-3K	D1.103
PMV2-5RB-C	D1.34	PN12-56HDR-2K	D1.106	PN18-14R-C	D1.6
PMV2-6FB-3K	D1.120	PN12-56HDR-L	D1.13	PN18-38R-C	D1.6
PMV2-6FB-C	D1.35	PN12-6HDR-2K	D1.106	PN18-4R-3K	D1.103
PMV2-6RB-3K	D1.118	PN12-8HDR-2K	D1.106	PN18-4R-C	D1.6
PMV2-6RB-C	D1.34	PN12-8HDR-L	D1.13	PN18-4RN-C	D1.6
PMV2-P10-C	D1.60	PN14-10F-3K	D1.107	PN18-56R-C	D1.6
PMV2-P12B-3K	D1.138	PN14-10F-C	D1.22	PN18-5SLF-3K	D1.112
PMV6-35RB-2K	D1.118	PN14-10FF-3K	D1.113	PN18-5SLF-C	D1.26
PMV6-3R-L	D1.34	PN14-10FF-C	D1.28	PN18-610R-C	D1.8
PMV6-3RB-2K	D1.118	PN14-10FN-3K	D1.107	PN18-6F-3K	D1.107
PMV6-4F-L	D1.35	PN14-10FN-C	D1.22	PN18-6F-C	D1.22
PMV6-4FB-2K	D1.120	PN14-10LF-3K	D1.110	PN18-6FF-3K	D1.113
PMV6-4R-L	D1.34	PN14-10LF-C	D1.24	PN18-6FF-C	D1.28
PMV6-4RB-2K	D1.118	PN14-10LFN-C	D1.24	PN18-6FN-3K	D1.107
PMV6-5F-L	D1.35	PN14-10R-3K	D1.103	PN18-6FN-C	D1.22
PMV6-5FB-2K	D1.120	PN14-10R-C	D1.6	PN18-6LF-3K	D1.110
PMV6-5R-L	D1.34	PN14-10RX-C	D1.8	PN18-6LF-C	D1.24
PMV6-5RB-2K	D1.118	PN14-10SLF-3K	D1.112	PN18-6LFW-C	D1.24
PMV6-6F-L	D1.35	PN14-10SLF-C	D1.26	PN18-6R-3K	D1.103
PMV6-6FB-2K	D1.120	PN14-12R-Q	D1.6	PN18-6R-C	D1.6
PMV6-6R-L	D1.34	PN14-14F-3K	D1.107	PN18-6RN-3K	D1.103
PMV6-6RB-2K	D1.118	PN14-14F-C	D1.22	PN18-6RN-C	D1.6
PMV6-8R-L	D1.34	PN14-14R-3K	D1.103	PN18-6SLF-3K	D1.112
PMV6-8RB-2K	D1.118	PN14-14R-C	D1.6	PN18-6SLF-C	D1.26
PMV6-P10-L	D1.60	PN14-14RX-L	D1.8	PN18-8F-3K	D1.107
PN10-10F-2K	D1.107	PN14-14SLF-C	D1.26	PN18-8F-C	D1.22
PN10-10F-L	D1.22	PN14-38R-L	D1.6	PN18-8FF-3K	D1.113
PN10-10FF-2K	D1.113	PN14-4R-3K	D1.103	PN18-8FF-C	D1.28
PN10-10FF-L	D1.28	PN14-4R-C	D1.6	PN18-8LF-3K	D1.110
PN10-10LF-2K	D1.110	PN14-56R-C	D1.6	PN18-8LF-C	D1.24
PN10-10LF-L	D1.24	PN14-5SLF-3K	D1.112	PN18-8R-3K	D1.103
PN10-10R-2K	D1.103	PN14-5SLF-C	D1.26	PN18-8R-C	D1.6
PN10-10R-L	D1.6	PN14-610R-C	D1.8	PN18-8SLF-3K	D1.112
PN10-10RX-L	D1.8	PN14-6F-3K	D1.107	PN18-8SLF-C	D1.26
PN10-10SLF-2K	D1.112	PN14-6F-C	D1.22	PN22-10R-C	D1.6
PN10-10SLF-L	D1.26	PN14-6FF-3K	D1.113	PN22-2F-C	D1.22
PN10-12R-Q	D1.6	PN14-6FF-C	D1.28	PN22-2R-C	D1.6
PN10-14F-2K	D1.107	PN14-6FN-3K	D1.107	PN22-4F-C	D1.22
PN10-14F-L	D1.22	PN14-6FN-C	D1.22	PN22-4R-C	D1.6
PN10-14LF-L	D1.24	PN14-6LF-3K	D1.110	PN22-6F-C	D1.22
PN10-14R-2K	D1.103	PN14-6LF-C	D1.24	PN22-6R-C	D1.6
PN10-14R-L	D1.6	PN14-6LFW-C	D1.24	PN22-8R-C	D1.6
PN10-14RX-L	D1.8	PN14-6R-3K	D1.103	PNF10-10F-L	D1.22
PN10-14SLF-L	D1.26	PN14-6R-C	D1.6	PNF10-10FF-2K	D1.114
PN10-38R-2K	D1.103	PN14-6RN-3K	D1.103	PNF10-10LF-2K	D1.110
PN10-38R-L	D1.6	PN14-6RN-C	D1.6	PNF10-10LF-L	D1.25
PN10-38RX-L	D1.8	PN14-6RX-C	D1.8	PNF10-10R-2K	D1.104
PN10-56R-2K	D1.103	PN14-6SLF-3K	D1.112	PNF10-10R-L	D1.7
PN10-56R-L	D1.6	PN14-6SLF-C	D1.26	PNF10-10SLF-2K	D1.112
PN10-56RX-L	D1.8	PN14-8F-3K	D1.107	PNF10-10SLF-L	D1.27
PN10-5SLF-L	D1.26	PN14-8F-C	D1.22	PNF10-14F-2K	D1.108
PN10-610R-L	D1.8	PN14-8FF-3K	D1.113	PNF10-14F-L	D1.22
PN10-6F-2K	D1.107	PN14-8FF-C	D1.28	PNF10-14LF-2K	D1.110
PN10-6F-L	D1.22	PN14-8LF-3K	D1.110	PNF10-14LF-L	D1.25
PN10-6LF-2K	D1.110	PN14-8LF-C	D1.24	PNF10-14R-2K	D1.104
PN10-6LF-L	D1.24	PN14-8R-3K	D1.103	PNF10-14R-L	D1.7
PN10-6R-2K	D1.103	PN14-8R-C	D1.6	PNF10-14SLF-L	D1.27
PN10-6R-L	D1.6	PN14-8RX-C	D1.8	PNF10-38R-2K	D1.104
PN10-6RX-L	D1.8	PN14-8SLF-3K	D1.112	PNF10-38R-L	D1.7

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index