


# Single pole, multiclamp terminal blocks

## Screw clamp

DIN 1 - 3

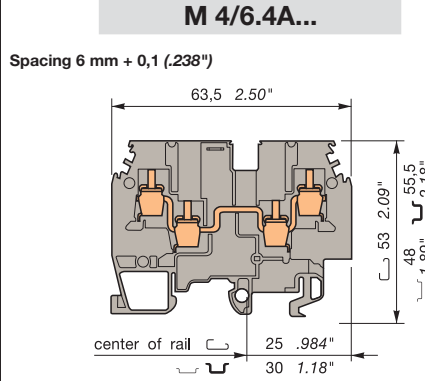

Standard 6 mm block. 1SNA 115 479 R2300


Colour	Type	Part numbers
--------	------	--------------

Standard blocks


Grey	<input type="checkbox"/> M 4/6.4A	1SNA 115 479 R2300
Blue	<input type="checkbox"/> M 4/6.4A.N	1SNA 125 479 R2500
Beige	<input type="checkbox"/> M 4/6.4A	1SNA 195 479 R2400

M 4/6.4A with partition


Grey	<input type="checkbox"/> M 4/6.4A.1	1SNA 115 482 R0700
------	-------------------------------------	--------------------



### Accessories

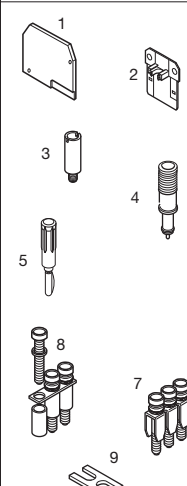

	Type	Part numbers
1 End section	grey	FEM4A th. 3,0 mm 1SNA 116 629 R2200
	blue	FEM4A th. 3,0 mm 1SNA 126 629 R2400
	yellow	<b>FEM4A th. 3,0 mm 1SNA 103 863 R2100</b>
	beige	FEM4A th. 3,0 mm 1SNA 196 629 R2300
2 Circuit separator	grey	SCM6 1SNA 113 003 R1000
	blue	SCM6 1SNA 123 003 R1200
	yellow	SCM6 1SNA 103 020 R2300
	beige	SCM6 1SNA 193 003 R1100
3 Test socket	AL2 (1) DIA. 2,0 mm	1SNA 163 043 R2100
	AL3 (1) DIA. 3,0 mm	1SNA 163 261 R0000
4 Test device	DCJ yellow	1SNA 173 059 R0300
5 Test plug	FC2 DIA. 2,0 mm	1SNA 007 865 R2600
7 Assembled jumper bar (with IP 20 protection)	32 A	BJMI6 (1)(2) 2 poles 1SNA 176 663 R0000
	32 A	BJMI6 (1)(2) 3 poles 1SNA 176 664 R0100
	32 A	BJMI6 (1)(2) 4 poles 1SNA 176 665 R0200
	32 A	BJMI6 (1)(2) 5 poles 1SNA 176 666 R0300
	32 A	BJMI6 (1)(2) 10 poles 1SNA 176 667 R0400
	32 A	BJMI6 (1)(2) 20 poles 1SNA 174 784 R2000
8 Jumper bar not assembled Post + screw + washer IP20	BJS6 (1)(2)	1SNA 206 394 R0200
9 Connector plate	EL6	1SNA 173 627 R2100



12 Alternated jumper bar	35 A	BJA6 (1)(2) 1SNA 116 541 R1200
13 Universal jumper bar	50 A	BJDP1 (1)(2) spacing 6 <-> spacing 16 1SNA 179 623 R0300
	70 A	BJDP3 (1)(2) spacing 6 <-> spacing 12 1SNA 179 625 R0500
	50 A	BJDP4 (1)(2) spacing 6 <-> spacing 8 or 10 1SNA 174 781 R2500
	35 A	BJP6 (1)(2) 1SNA 174 413 R1400
14 Pivoting jumper bar	35 A	PC6 2 poles 1SNA 113 546 R1400
	35 A	PC6 3 poles 1SNA 116 536 R0500
	35 A	PC6 4 poles 1SNA 116 537 R0600
	35 A	PC6 10 poles 1SNA 113 548 R2600
15 Comb-type jumper bar		EIP 1SNA 113 550 R2400
		AD2,5 1SNA 114 205 R2000
16 IDC jumper		

End stop	th. 9 mm	BADL	1SNA 399 903 R0200
End stop	th. 10 mm	BAM2	1SNA 206 351 R1600
End stop	th. 10 mm	BAR	1SNA 164 338 R0600
Rail	35 x 7,5 x 1	PR3.Z2	1SNA 174 300 R1700
Rail	35 x 15 x 2,3	PR4	1SNA 168 500 R1200
Rail	35 x 15 x 1,5	PR5	1SNA 168 700 R2200
Rail	32 x 15 x 1,5	PR1.Z2	1SNA 163 050 R0400

Other end stops, rails and accessories : see section on accessories.

### Characteristics

Wire size		IEC	UL	CSA
		NFC DIN		
Screw clamp	Rigid	0,2-4 mm <sup>2</sup>	22-10 AWG	12 AWG maxi.
	Flexible	0,22-4 mm <sup>2</sup>	22-10 AWG	12 AWG maxi.

Voltage			
Rated	800 V	600 V	600 V
Impulse withstand	8 kV		
Pollution degree	3		

Current			
Rated	32 A	20 A	25 A

Wire size			
Rated / Gauge	4 mm <sup>2</sup> / A4	10 AWG	12 AWG
Wire strip. length	Recomm. Screwdriver	Recomm. torque	Protection
9,5 mm	4 mm	0,5-0,8 Nm	IP 20
.37"	.157"	4.4-7.1 lb.in	NEMA 1

### Notes

The use of some accessories may decrease the block's voltage rating. For more information, consult us.



**R** See section on marking method RC65 - RC610 RCT610

Nota : (1) A circuit separator SC may be required with the use of these accessories.  
(2) Use of these accessories requires the user to cut out the partition of the terminal block M 4/6.4A.1.