

Intended Use

Suitable for architectural applications where aesthetics and superior performance are required.

Construction

Injection-molded acrylic panels, ultrasonically welded to eliminate visible hardware.

Depth of molded letters increases toward bottom of

panel for better, more uniform illumination. Chevron directional indicators.

Long-life LEDs feature very low energy consumption and rated life up to 25 years.

Emergency operation exits use maintenance-free nickel-cadmium battery.

Recessed mounting. Rough-in section recessed into wall

or ceiling for top, back or end mounting capability.

Surface top-mount (TM) option available on non-emergency exits, and attaches directly to J-box. Can be used for pendant mounting.

Special wording available; consult factory.

Listings

UL Listed. Meets UL924. CSA or NOM Certified (see Options).

LRP
Precise® Edge-Lit



ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: LRP 1 RC 120/277 EL N

Series	Housing	Number of faces	Letter color	Directional indicators	Voltage	Operation	Mounting	Options
LRP LED	(blank) Brushed aluminum	1 Single	RW Red on white	(blank) No chevrons	120/277 Dual voltage	(blank) Standard non-emergency	(blank) Ceiling or back	(blank) Complete exit panel and rough-in section
	W White	2 Double	RC Red on clear ¹	LA Left ¹	120/347 Dual voltage ⁴	EL N Nickel-cadmium battery ²	EM End	PNL Panel assembly only
	B Black		RMR Red on mirror ²	RA Right ¹		X2 Lamps wired on two separate circuits ^{3,5}	TM Top ⁶	CSA Meets Canadian standards
	BZ Bronze		GW Green on white ³	LRA Left and right		LDC6 6V DC input for LED lamp ⁴		NOM Meets Mexican standards
	BS Brass		GC Green on clear ^{1,3}	DA Double-face chevrons ²		LDC12/48 12-48V DC input for LED lamp ⁴		FI Fire alarm interface ³
	CR Chrome		GMR Green on mirror ^{2,3}					FA Flashing emergency operation and intermittent audible alarm ^{3,7}

ADDITIONAL INFORMATION

For additional product information, visit www.lithonia.com.






ELECTRICAL APPLICATION DATA				
TYPE	VOLTS	FACES	AMPS	WATTS
Standard LED Red	120	1	.087	1.5
Standard LED Red	120	2	.178	3.1
Standard LED Red	277	1	.089	1.8
Standard LED Red	277	2	.178	3.4
Emergency LED Red	120	1	.093	2.3
Emergency LED Red	120	2	.084	3.2
Emergency LED Red	277	1	.095	2.7
Emergency LED Red	277	2	.094	3.9
Standard LED Green	120	1	.064	1.2
Standard LED Green	120	2	.059	2.0
Standard LED Green	277	1	.062	1.3
Standard LED Green	277	2	.061	2.3
Emergency LED Green	120	1	.066	1.7
Emergency LED Green	120	2	.138	3.7
Emergency LED Green	277	1	.064	1.9
Emergency LED Green	277	2	.130	3.8

ACCESSORIES		
ORDER SEPARATELY		
LED ROUGH-IN SECTION ⁸		
Standard	ELA LCRIS	1 or 2 faces, red or green
Standard	ELA LRIS 120 X2	1 or 2 faces, 120V w/X2 option
Standard	ELA LRIS 277 X2	1 or 2 faces, 277V w/X2 option
Emergency	ELA R LRIS 120/277 EL N	1 face, red
Emergency	ELA R 2LRIS 120/277 EL N	2 faces, red
Emergency	ELA G LRIS 120/277 EL N	1 face, green
Emergency	ELA G 2LRIS 120/277 EL N	2 faces, green
Pendant mounting (top mount only)	ELA US12	12" pendant kit with brushed aluminum canopy

Specification (add to catalog number)	Graphics	
	Back	Front
LA		<EXIT
RA		EXIT>
LRA (single face)		<EXIT>
DA	<EXIT	EXIT>
LRA (double face)	<EXIT>	<EXIT>

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

Shipping weight: 5 lbs (2.3 kg)

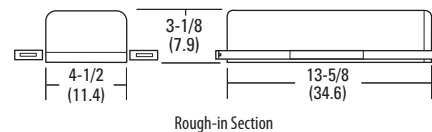

Notes

- 1 Single-face exits only.
- 2 Mirror background simulates clear for double-face option.
- 3 Not available with CSA.
- 4 Only available with CSA. Consult specification sheet for further information.
- 5 Must specify input voltage 120 or 277.
- 6 Non-emergency exits only. No rough-in section required. Not available with LDC6 or LDC12/48.
- 7 Only available with EL N.
- 8 Supplied standard with exit unless PNL suffix is specified. Order separately only if necessary for early installation. When ordering rough-in separately, all options must be included with rough-in nomenclature (example: ELA LCRIS 120/277 FI).