

FEATURES & SPECIFICATIONS

INTENDED USE — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (2-3/8") also makes it an excellent choice for renovation projects.

CONSTRUCTION — BLT enclosure components are die-formed for dimensional consistency and painted after fabrication with a polyester powder paint for improved performance and protection.

The reflector is finished with a high reflective matte white powder paint for improved aesthetics and increased light diffusion.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability. Injection molded diffuser light traps add a finished look to the diffuser ends and help seal the diffuser to the housing end plates. Optional diffuser trim rings provide an attractive mounting for integral sensors as well as adding a decorative element to the luminaire aesthetics.

LED boards are accessible from below; driver is accessible from the plenum.

OPTICS — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces – rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available - curved and square designs with linear prisms or a smooth frosted finish.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 70% LED lumen maintenance at 60,000 hours (L70/60,000).

Non-Configurable BLT: 0-10 volt dimming driver. Dims to 10%

Configurable BLT: available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. It can be accomplished with integrated nLight AIR wireless or through standard Cat-5 cabling. nLight offers unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission, while nLight AIR is commissioned easily through an intuitive model app.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

SENSOR — Integrated sensor (individual control): Sensor Switch MSD7ADCX ((Passive infrared (PIR) or MSDPDT7ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 4 for the nLight sensor options.

Integrated Smart Sensor (nLight Air Wireless Platform): The rES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is both a digital PIR occupancy sensor/automatic dimming photocell. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY, which allows for simple sensor adjustment. See page 4 for more details on the Integrated Smart Sensor.

INSTALLATION — The BLT's low profile design of only 2-3/8" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

LISTINGS — CSA Certified to meet U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

BLT Series LED

2BLT

2' x 2'
LED



eldoLED




Specifications

Length: 23-3/4 (60.3)

Width: 23-3/4 (60.3)


Depth: 2-3/8 (6.0)

Depth with Air supply/return: 2-3/4 (6.9)

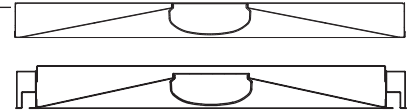

All dimensions are inches (centimeters) unless otherwise specified.

Multiple Diffuser Options

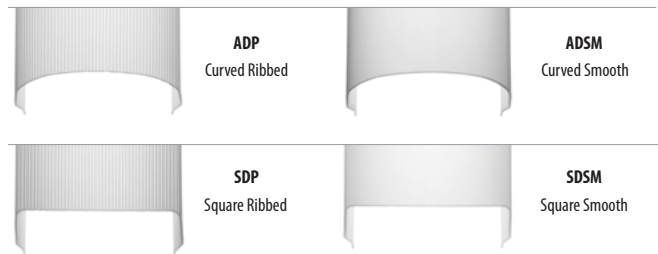

2BLT Volumetric Recessed Lighting 2'x2'

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2BLT2 33L ADP EZ1 LP835

Series	Air function	Lumens ¹	Diffuser	Voltage	Driver	Color temperature	
2BLT2 2X2 BLT	(blank) Static A Air supply/return	Standard efficiency (>100 LPW) 20L 2000 33L 3300 40L 4000	High efficiency^{2,3} (>130 LPW) 33LHE 3300 40LHE 4000 48LHE 4800	ADP Curved, linear prisms ADSM Curved, smooth SDP Square, linear prisms SDSM Square, smooth Diffusers w/ trim rings ADPT Curved, linear prisms ADSMT Curved, smooth SDPT Square, linear prisms SDSMT Square, smooth	(blank) MVOLT 120 120V 277 277V 347 347V ⁴	EZ1 eldoLED dims to 1% (0-10 volt dimming) SLD Step-level dimming ⁵ LE1 Lutron Ecosystem driver dims to 1% ^{5,6}	LP830 82CRI, 3000 K LP835 82CRI, 3500 K LP840 82CRI, 4000 K LP850 82CRI, 5000 K LP930 90CRI, 3000K LP935 90CRI, 3500K LP940 90CRI, 4000K LP950 90CRI, 5000K

Controls	Occupancy control ⁹	Options
(blank) No nLight [®]	(blank) No sensor control	EL7L 700 lumen battery pack ¹²
N80 nLight [®] with 80% lumen management	nLight Wired Networking	EL14L 1400 lumen battery pack ¹²
N80EMG nLight [®] with 80% lumen management For use with generator supply EM power ⁷	NES7 nLight [™] nES 7 PIR integral occupancy sensor ¹⁰	CP Chicago plenum ¹³
N100 nLight [®] without lumen management	NESPDT7 nLight [™] nES PDT 7 dual technology integral occupancy control ¹⁰	BGTD Bodine Generator Transfer Device ¹⁴
N100EMG nLight [®] without lumen management For use with generator supply EM power ⁷	NES7ADCX nLight [™] nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell ¹⁰	PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit
NLTAIR nLight AIR enabled ⁸	NESPDT7ADCX nLight [™] nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell ¹⁰	PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit
	nLight Wireless Networking	PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray ¹⁵
	RES7N nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities	PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires ¹⁵
		GLR Fast-blowing fuse ¹⁶
		GMF Slow-blowing fuse ¹⁶
		NPLT Narrow pallet
		RRL_ RELOC [®] -ready luminaire ¹⁷
		LATC Earthquake clip
		DWAM Anti-Microbial paint
		JP32 Job packaging

Non-Configurable BLT								
Stock/MTO	Catalog Description *	UPC	Lumens	Wattage	LPW	Color Temperature	Voltage	Pallet Qty
Stock	2BLT2 33L ADP LP835	00889804471908	3241	30	108	3500K/82 CRI	120-277	52
	2BLT2 33L ADP LP840	00889804471939	3313	30	111	4000K/82CRI	120-277	52
	2BLT2 33L ADP EL14L LP835	00889804620023	3241	30	108	3500K/82CRI	120-277	52
	2BLT2 33L ADP EL14L LP840	00889804620061	3313	30	111	4000K/82CRI	120-277	52
MTO	2BLT2 33L ADP 347 LP835	00889804569384	3241	30	108	3500K/82 CRI	347	52
	2BLT2 33L ADP 347 LP840	00889804569407	3313	30	111	4000K/82CRI	347	52

*0-10V Dimming to 10%.

Accessories next page

Notes

- Approximate lumen output.
- All versions may not achieve 130+ LPW. Refer to photometry on www.acuitybrands.com.
- High efficiency performance not available in AIR versions, 90 CRI or versions with integral sensor/trim rings.
- Not available with SLD driver, EL7L or EL14L battery packs.
- Not available with N80, N80EMG, N100, N100EMG, NLTAIR, or occupancy control.
- Not available with controls, occupancy controls, or PWS options. Consult factory for Hi-Lume dimming.
- nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
- Must order with RES7N or RES7Z sensor. Only available with EZ1 driver.
- Must specify diffuser with trim rings. See sensor options on page 4.
- Requires N80, N80EMG, N100, or N100EMG.
- Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
- When using pre-wire option, use PWS1846. or PWS1846 PWSLV.
- Not available with N80, N80EMG, N100 or N100EMG.
- Requires BSE labeling, voltage specific. Consult factory for options.
- Not available with nLIGHT wired/wireless network or individual controls.
- Must specify voltage, 120 or 277 with GLR & GMF fusing and BGTD.
- For ordering logic consult: RRL_2013.



2BLT-2X2

2BLT Volumetric Recessed Lighting 2'x2'

Accessories: Order as separate catalog number.	
DGA22	Drywall grid adapter for 2x2 recessed fixture

nLight® Wired Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight .			
WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODM [color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODM DX [color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD GFX [color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CAT5 10FT J1
		30' cable	CAT5 30FT J1

nLight® AIR Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair .	
Wall switches	Model number
On/Off single pole	rPODB [color]
On/Off two pole	rPODB 2P [color]
On/Off & raise/lower single pole	rPODB DX [color]
On/Off & raise/lower two pole	rPODB 2P DX [color]
On/Off & raise/lower single pole	rPODBZ DX WH ¹

Notes

1 Can only be ordered with the RES7Z zone control sensor version.

Replacement Parts: Order as separate catalog number.		
*237LJR	2DBLT24 ADP LENS ASSEMBLY	2 ft. replacement lens (light traps included)
*237LKH	2DBLT24 SDP LENS ASSEMBLY	2 ft. replacement lens (light traps included)
*237LKY	2DBLT24 ADSM LENS ASSEMBLY	2 ft. replacement lens (light traps included)
*237LL7	2DBLT24 SDSM LENS ASSEMBLY	2 ft. replacement lens (light traps included)
*237LT1	2DBLT24 ADPT LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237LT3	2DBLT24 SDPT LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237LT5	2DBLT24 ADSMT LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237LT7	2DBLT24 SDSMT LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237LT9	2DBLT24 ADPT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237M4Y	2DBLT24 SDPT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237M57	2DBLT24 ADSMT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)
*237M5H	2DBLT24 SDSMT SENSOR LENS ASSEMBLY	2 ft. replacement lens (trims included)


2BLT Volumetric Recessed Lighting 2'x2'

Sensor Options						
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking	nLight AIR Networking	nLight AIR Zone
		PIR	PDT			
MSD7ADCX	X	X				
MSDPDT7ADCX	X		X			
NES7		X		X		
NES7ADCX	X	X		X		
NESPDT7			X	X		
NESPDT7ADCX	X		X	X		
RES7N	X	X			X	
RES7Z	X	X				X

Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.

The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

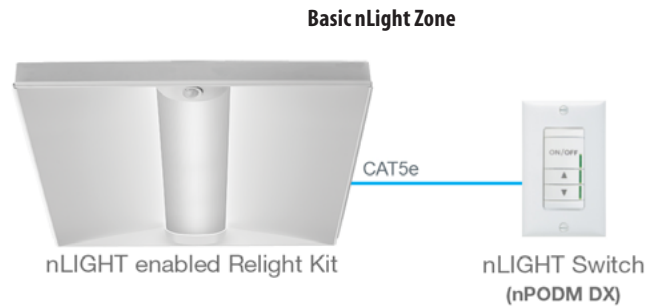


nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the NES7ADCX includes an integrated photocell, which enables daylight harvesting controls.


For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the NESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

Sequence of Operation

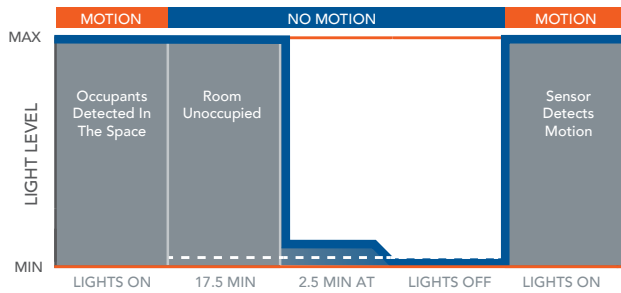

*The presetting on the automatic dimming photocell is 5fc.

Sequence of Operation


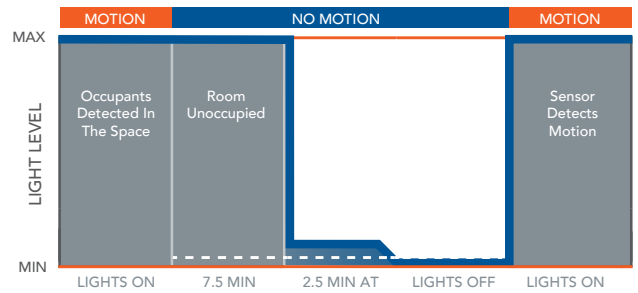


*The presetting on the automatic dimming photocell is 5fc.

Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and
- 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

9 FT Mounting

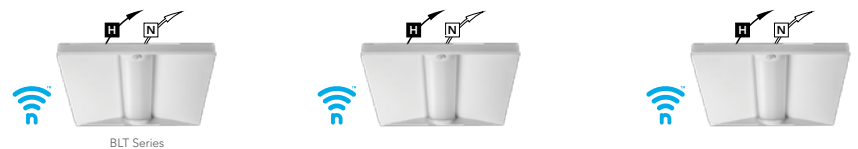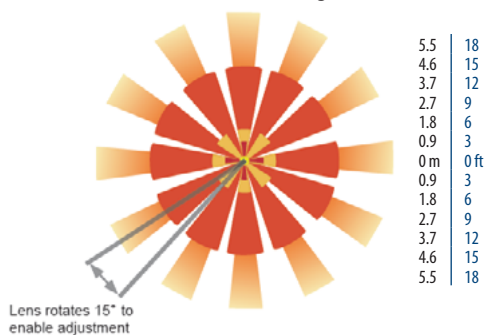

Simple as 1,2,3


1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



2BLT Volumetric Recessed Lighting 2'x2'


PHOTOMETRICS

2BLT2 33L ADP LP835, 3241 delivered lumens, test no. LTL28918P4, tested in accordance to IESNA LM-79

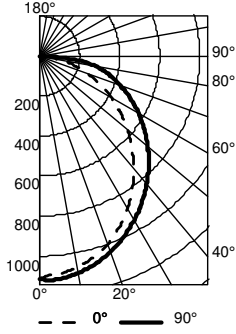

CP Summary		Coefficients of Utilization												Zonal Lumen Summary			
0° 90		80%			70%			50%									
0°	90	pw	70%	50%	30%	50%	30%	10%	50%	30%	10%	Zone	Lumens	% Lamp	% Fixture		
0°	1114	1114	0	119	119	119	116	116	116	111	111	111	0° - 30°	852	26.3	26.3	
5°	1092	1118	1	108	103	98	100	96	92	96	92	89	0° - 40°	1385	42.7	42.7	
15°	1042	1075	2	98	89	82	87	80	75	83	78	73	0° - 60°	2440	75.3	75.3	
25°	943	996	3	89	78	69	76	68	62	73	66	61	0° - 90°	3242	100.0	100.0	
35°	808	891	4	81	69	60	67	59	52	65	57	52	90° - 180°	0	0.0	0.0	
45°	653	770	5	75	61	52	60	52	45	58	50	44	0° - 180°	3242	100.0	100.0	
55°	492	638	6	69	55	46	54	46	39	52	45	39					
65°	334	501	7	64	50	41	49	41	35	48	40	34					
75°	177	359	8	59	46	37	45	37	31	44	36	31					
85°	44	147	9	56	42	34	41	33	28	40	33	28					
90	5	2	10	52	39	31	38	30	25	37	30	25					



2BLT2 40L ADP LP835, 4210 delivered lumens, test no. LTL28918P5, tested in accordance to IESNA LM-79

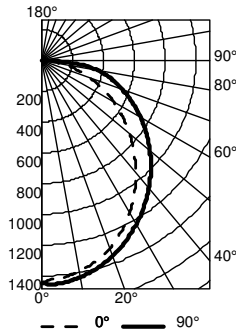

CP Summary		Coefficients of Utilization												Zonal Lumen Summary			
0° 90		80%			70%			50%									
0°	90	pw	70%	50%	30%	50%	30%	10%	50%	30%	10%	Zone	Lumens	% Lamp	% Fixture		
0°	1447	1447	0	119	119	119	116	116	116	111	111	111	0° - 30°	1107	26.3	26.3	
5°	1419	1452	1	108	103	98	100	96	92	96	92	89	0° - 40°	1799	42.7	42.7	
15°	1354	1396	2	98	89	82	87	80	75	83	78	73	0° - 60°	3169	75.3	75.3	
25°	1224	1294	3	89	78	69	76	68	62	73	66	61	0° - 90°	4211	100.0	100.0	
35°	1050	1158	4	81	69	60	67	59	52	65	57	52	90° - 180°	0	0.0	0.0	
45°	849	1001	5	75	61	52	60	52	45	58	50	44	0° - 180°	4211	100.0	100.0	
55°	640	829	6	69	55	46	54	46	39	52	45	39					
65°	434	650	7	64	50	41	49	41	35	48	40	34					
75°	230	466	8	59	46	37	45	37	31	44	36	31					
85°	57	191	9	56	42	34	41	33	28	40	33	28					
90	7	3	10	52	39	31	38	30	25	37	30	25					

Constant Lumen Management


Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

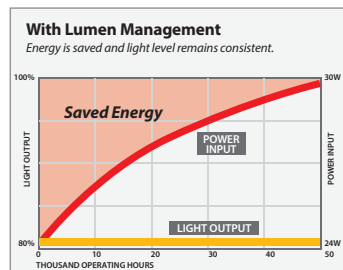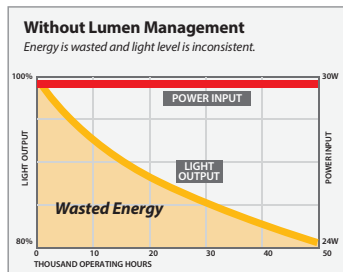

Performance Data			
Lumen Package	Lumens	Input Watts	LPW
20L ADP LP830	2157	20	110
20L ADP LP835	2213	20	113
20L ADP LP840	2261	20	116
20L ADP LP850	2373	20	121
33L ADP LP830	3160	30	106
33L ADP LP835	3241	30	108
33L ADP LP840	3313	30	111
33L ADP LP850	3476	30	116
40L ADP LP830	4103	39	106
40L ADP LP835	4209	39	108
40L ADP LP840	4302	39	111
40L ADP LP850	4514	39	116
AIR 20L ADP LP830	2019	20	103
AIR 20L ADP LP835	2060	20	105
AIR 20L ADP LP840	2116	20	108
AIR 20L ADP LP850	2134	20	109
AIR 33L ADP LP830	2957	28	104
AIR 33L ADP LP835	3017	28	107
AIR 33L ADP LP840	3099	28	109
AIR 33L ADP LP850	3126	28	110
AIR 40L ADP LP830	3841	39	99
AIR 40L ADP LP835	3919	39	101
AIR 40L ADP LP840	4025	39	104
AIR 40L ADP LP850	4060	39	104

HE Performance Data			
Lumen Package	Lumens	Input Watts	LPW
33LHE ADP LP830	3537	28	126
33LHE ADP LP835	3628	28	130
33LHE ADP LP840	3708	28	132
33LHE ADP LP840	3708	28	139
40LHE ADP LP830	4118	32	127
40LHE ADP LP835	4224	32	131
40LHE ADP LP840	4317	32	134
40LHE ADP LP850	4530	32	140
48LHE ADP LP830	4699	37	128
48LHE ADP LP835	4820	37	131
48LHE ADP LP840	4927	37	134
48LHE ADP LP850	5169	37	140

MOUNTING DATA	
Ceiling Type	Appropriate Trim Type
Exposed grid tee (1' and 9/16")	G
Concealed grid tee	G
Plaster or plasterboard	G*

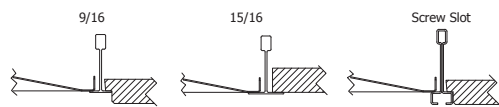

*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 24-3/4" (Tolerance is +1/8", -0").