


# Beams



- Quickly attaches conduit to beams.
- Fasteners will rotate 360°.
- Simply installed with a hammer.


## Push-Type Conduit To Beam Fasteners

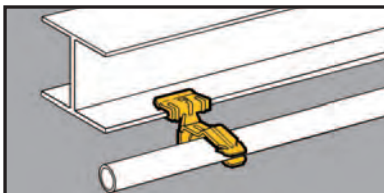

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
781011 19275	<b>BP-8-E-2-4</b>	1/2" EMT	1/8" - 1/4"	100
781011 19280	<b>BP-8-E-5-8</b>	1/2" EMT	5/16" - 1/2"	100
781011 19285	<b>BP-8-E-9-12</b>	1/2" EMT	9/16" - 3/4"	100
781011 19375	<b>BP-12-E-2-4</b>	3/4" EMT 1/2" IMC, Rigid	1/8" - 1/4"	100
781011 19380	<b>BP-12-E-5-8</b>	3/4" EMT 1/2" IMC, Rigid	5/16" - 1/2"	100
781011 19385	<b>BP-12-E-9-12</b>	3/4" EMT 1/2" IMC, Rigid	9/16" - 3/4"	100
781011 19465	<b>BP-16-E-2-4</b>	1" EMT 3/4" IMC, Rigid	1/8" - 1/4"	100
781011 19470	<b>BP-16-E-5-8</b>	1" EMT 3/4" IMC, Rigid	5/16" - 1/2"	100
781011 19475	<b>BP-16-E-9-12</b>	1" EMT 3/4" IMC, Rigid	9/16" - 3/4"	100

Beams

**Ultimate  
Static Load  
Capacity**



15 Lbs.

Read safety/installation instruction sheets in packages before use.