


# NDN Series Feed Through Blocks




## NDN Series

The NDN Series features a compact line of rail-mounted terminal blocks suitable for both 35mm DIN-Rail or C-Rail applications. Products easily snap onto the mounting rail for a quick, simple, low-cost solution. Available accessories include jumpers and marking tape.


UL E62622  
CSA File 15364  
CSA File 47235 (NDN1, NDN111)

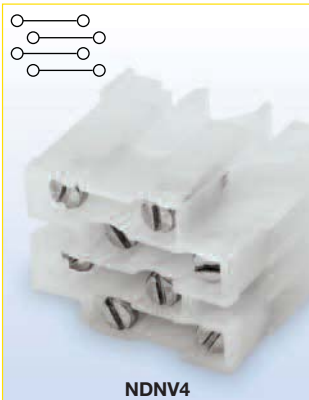

NDNV4

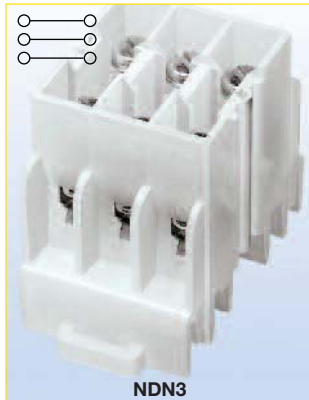

NDN3

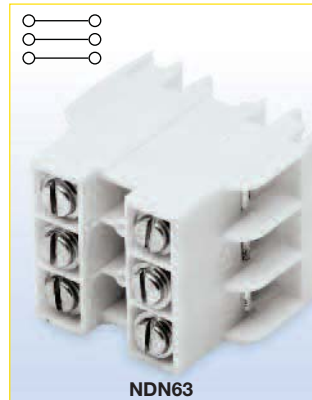


NDN63

Approval	
Technical Data	
Rated voltage	600V
Rated Current	30A
Center spacing, in (mm)	0.25 / 6.35
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	22~10 / 0.5~6
Number of Poles	4
Circuits per foot	48
Torque(N•m)	2
Torque(lb-in)	18
Screw	#6-32
WxHxD(mm)	25.4 x 34 x 42.4

Colors	Cat. No.
○ White (Standard)	NDNV4-WH
● Black	NDNV4-BK
● Yellow	NDNV4-YE


Accessories	Cat. No.
4 circuits	JN4
	MTC6
35mm DIN-Rail	DRL35MML0 DRL35MMHI
C-Rail	NFTA Series
C-Rail (low profile)	NRA Series
Modular Option	N/A



Approval	
Technical Data	
Rated voltage	600V
Rated Current	30A
Center spacing, in (mm)	0.3 / 7.62
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	22~10 / 0.5~6
Number of Poles	3
Circuits per foot	38
Torque(N•m)	2
Torque(lb-in)	18
Screw	#6-32
WxHxD(mm)	23.9 x 33.3 x 42.4

Colors	Cat. No.
○ White (Standard)	NDN3-WH
● Black	NDN3-BK
● Blue	NDN3-BL
● Yellow	NDN3-YE
● Red	NDN3-RE


Accessories	Cat. No.
2 circuits	JND3
	MT12-1-2
35mm DIN-Rail	DRL35MML0 DRL35MMHI
C-Rail	NFTA Series
C-Rail (low profile)	NRA Series
Modular Option	N/A



Approval	
Technical Data	
Rated voltage	600V
Rated Current	65A
Center spacing, in (mm)	0.375 / 9.52
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	18~6 / 1~16
Number of Poles	3
Circuits per foot	30
Torque(N•m)	4
Torque(lb-in)	35
Screw	#10-32
WxHxD(mm)	29.7 x 36.8 x 42.4

Colors	Cat. No.
○ White (Standard)	NDN63-WH
● Black	NDN63-BK
● Yellow	NDN63-YE

Accessories	Cat. No.
2 circuits	JN3
	MT12-1-2
35mm DIN-Rail	DRL35MML0 DRL35MMHI
C-Rail	NFTA Series
C-Rail (low profile)	NRA Series
Modular Option	N/A



- Block
- Jumper
- Marking Tape
- Mounting
- Modular Option


# Multi-Pole Panel Mount Blocks



## Panel Mount Blocks

Multi-pole panel mount terminal blocks provide a compact, high density circuit connection solution without the necessity of a mounting rail. These products are designed to be nested together to form one string of circuit connections.

UL E62622  
CSA 15364 (excluding PLK3)

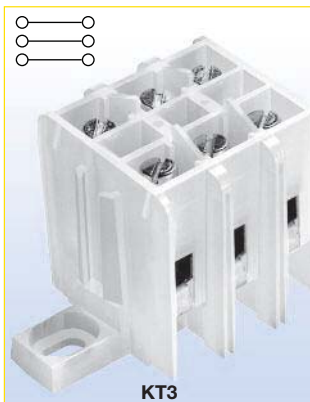


KT3

Approval	
Technical Data	
Rated voltage	600V
Rated Current	40A
Center spacing in (mm)	0.39 / 9.91
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	22-8 / 0.5-10
Number of Poles	3
Circuits per foot	28
Torque(N•m)	2
Torque(lb-in)	18
Screw	#8-32
WxHxD(mm)	59.5 x 31.8 x 31.0

Colors	Cat. No.
○ White (Standard)	KT3-WH
● Black	KT3-BK
● Red	KT3-RE

Accessories	Cat. No.
2 circuits	JN3
	MT12-1-2
Mounting Foot	KAD





KT4

Approval	
Technical Data	
Rated voltage	600V
Rated Current	30A
Center spacing in (mm)	0.25 / 6.35
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	22-10 / 0.5-6
Number of Poles	4
Circuits per foot	48
Torque(N•m)	2
Torque(lb-in)	18
Screw	#6-32
WxHxD(mm)	43.8 x 34.0 x 32.2

Colors	Cat. No.
○ White*	KT4-WH-A
○ White*	KT4-WH-B
● Black	KT4-BK

Accessories	Cat. No.
4 circuits	JN4
	MTC6

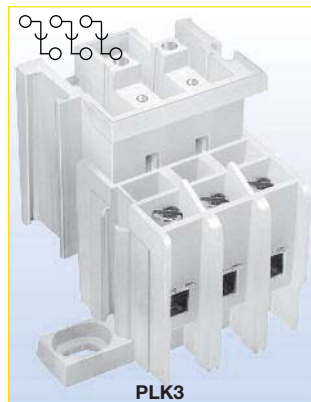


PLK3

Approval	
Technical Data	
Rated voltage	600V
Rated Current	40A
Center spacing in (mm)	0.39 / 9.91
Conductor cross-section, flexible (AWG/mm <sup>2</sup> )	22-8 / 0.5-10
Number of Poles	3
Circuits per foot	28
Torque(N•m)	2
Torque(lb-in)	18
Screw	#8-32
WxHxD(mm)	65.7 x 46.9 x 45.5

Colors	Cat. No.
○ White (Standard)	PLK3-WH

Accessories	Cat. No.
2 circuits	JN3
	MT12-1-2
Mounting Foot	KAD



\*The KT4 products are designed to be nested together to form one string of circuit connections. When used in series, order

# Catalog Number Index

Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page	Catalog Number	Page
JCI-	110	KBY	*	KQT	74	MCRW	*	NO.205	*
JCK-	112-114	KCF	74	KQV	74	MDA	92	NO.213	511
JCK-A-	112-114	KCH	74	KQW-M	*	MDA-V	92	NO.213-R 511	
JCK-B-	112-114	KCJ	74	KRP-C_SP	38-39	MDL	92	NO.216	511
JCL-	112-114	KCM	74	KRP-CL	39	MDL-V	92	NO.216-R	511
JCL-A-	112-114	KCM-B	74	KS-19392-L36	*	MDM	*	NO.220	508
JCL-B-	112-114	KCR	74	KT3	364	MDQ	92	NO.226	511
JCM	*	KCS	74	KT4	364	MDQ-V	92	NO.226-R	511
JCN	*	KCV	74	KTK	75	MFN	*	NO.242-R	511
JCP	*	KCY	74	KTK-R	25	MIC	78	NO.2621	511
JCQ-	110	KCZ	74	KTN-R	44	MIJ	*	NO.2621-R	511
JCR-A	112-114	KDA	74	KTN-S	*	MIN	78	NO.263	511
JCR-B-	112-114	KDB	74	KTS-R	45	MIS	79	NO.263-R	511
JCT-	110	KDC	74	KTS-S	*	MKB	*	NO.2641	511
JCU-	104	KDD	74	KTU	40	MMT	218, 220	NO.2641-R	511
JCW-	110	KDE	74	KU_(terminal blocks)	375	MSK-45	506	NO.2642	511
JCX-	103	KDF	74	KWN-R	*	MT	218, 220	NO.2661-R	511
JCY-	103	KDH	74	L09C	252	MT12	*	NO.2662-R	511
JCZ-	104	KDJ	74	L14C	252	MT12-1-2	358, 359, 360, 361 363, 364, 365	NO.2664-R	511
JDN	*	KDM	74	LAA	*	MTC6	358, 364	NO.270	508
JDZ-	104	KDP	74	LAC	*	MTMU	*	NO.36	507
JF1	*	KDR	74	LAG	*	MV055-	101	NO.4	509
JJN-	48	KDT	74	LAN	*	MV155-	102	NO.5	509
JJS-	49	KDU	74	LAR	*	N512	360	NO.6	509
JKS	36	KDY	74	LCT	215-216	NBB	*	NO.616	511
JM60100	289-293	KEF	*	LEF	*	NBC	*	NO.616-R	511
JM60200	289-293	KEM	*	LET	215-216	NBE	*	NO.626	511
JM60400	289-293	KER	*	LKB	*	NC3 361		NO.626-R	511
JM60600	289-293	KEW	74	LKC	*	ND-1260	*	NO.642-R	511
JN_	358, 359, 360, 361 362, 363, 364	KEX	74	LKN	*	NDN1	359	NO.663	511
JNDN3	358	KFH-A	74	LKS	*	NDN111 359		NO.663-R	511
JP600	299	KFM	74	LMMT	215, 217	NDN3 358		NO.7	509
JPA-3	*	KFT	74	LMT	215, 217	NDN63 358		NO.8	509
JSK-36	506	KFZ	74	LP-CC	23	NDND1	*	NON	37
JT	286-287	KGC	*	LPJ_SP	35	NDNF1-WH	322	NOS	37
JTN	286-287	KGJ	*	LPJ_SPI	35	NDNFD1-WH	322	NPL	*
JU	*	KGJ-A	*	LPN-RK_SP	41-43	NDNLFD1-WH	322	NRA Series	353, 358, 359 360, 361, 362, 363, 365
K07C	252	KGJ-E	*	LPN-RK_SPI	41-43	NDNV4 358		NSD	253
KAB	*	KGL	*	LPRK-28	507	NFA	*	NSE3	361
KAC	134	KGO-E	*	LPS-RK_SP	41-43	NFT2 360		NSS3	361
KAD	364	KGS	*	LPS-RK_SPI	41-43	NFT3 360		NTN-R_	511
KAD	*	KGS-A	*	LPT	*	NFTA Series	353, 358, 359 360, 361, 362, 363, 365	NTQ23	365
KAF	*	KGT	*	LUG1-_	398, 408	NI	263	NTS-R_	511
KAJ	*	KGX	*	LUG2-_	398, 408	NITD	253	NUE	*
KAL	*	KIG	74	LUG3-_	408	NNB	511	NXA	*
KAW	*	KIT-6POLE	413, 415	LUG5-_	402, 410	NNB-R	511	NXC	*
KAX	*	KJA	*	M09C	252	NNC	511	OIA	*
KAZ	79	KLC	*	MAI	222	NO.1	409	OJ	*
KBC	135	KLM	75	MAS	*	NO.100	*	OPM-1038	282-283
KBD	*	KLP	*	MAX-	83	NO.140	508	OPM-NG	284-285
KBJ	*	KLU	40	MAX-_ID	83	NO.2	509	OSD	253
KBR	*	KMH-C	*	MB-	52	NO.201	*	P-	51
KBT	*	KPF	74	MBO	*			P09C	252
		KQO	74	MC_ _ _	222				

\* Not listed in this catalog. Call Cooper Bussmann Customer Satisfaction for more information. Toll-free phone: 855-287-7626 (855-BUSSMANN)