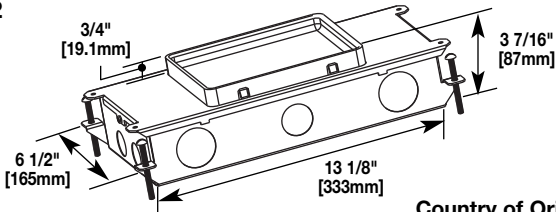
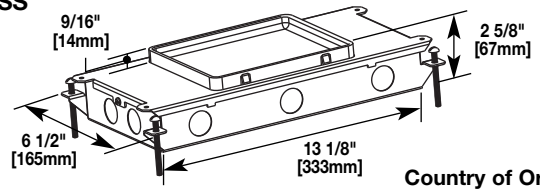
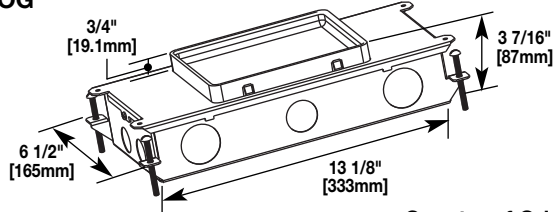


## Resource RFB Series Floor Box Selection Guide

Box Model	Install Floor Type:		Box Type:	Box Capacity:	Depth Behind Plates:	A/V Compatibility	Trade Size Conduit Feed:	Cover Style	Country of Origin	Adjustability
	Concrete	Wood								
RFB2	Yes	Yes	Above Grade	2 Gangs	3" [76mm]	↑ Legrand AVIP, Altinex Intera, Extron AAP, MAAP & Decorator, Ortronics Series II ↓	3/4" – 1 1/4"	FloorPort	USA	↑ Fully Adjustable ↓
RFB2-SS	Yes	Yes	Above Grade	2 Gangs	3" [76mm]		3/4" – 1 1/4"	FloorPort	USA	
RFB2-OG	Yes	Yes	On-Grade	2 Gangs	3" [76mm]		3/4" – 1 1/4"	FloorPort	USA	
RFB4	Yes	No	Above Grade	4 Gangs	2" [51mm]		3/4" – 1 1/4"	FloorPort	Mexico	
RFB4-4DB	Yes	No	Above Grade	4 Gangs	2" [51mm]		1/2" – 1"	FloorPort	Mexico	
RFB4-SS	Yes	No	Above Grade	4 Gangs	2" [51mm]		3/4" – 1 1/4"	FloorPort	Mexico	
RFB4-CI-1	Yes	No	On-Grade	4 Gangs	2" [51mm]		3/4" – 1 1/4"	FloorPort	China	
RFB4-CI-1-NA	Yes	No	On-Grade	4 Gangs	2" [51mm]		3/4" – 1 1/4"	FloorPort	USA	
RFB4E	Yes	No	Above Grade	4 Gangs	3 1/2" [89mm]		3/4" – 2"	Evolution 6CT, 6CTC & 6CFFTC Series	USA	
RFB4E-OG	Yes	No	On-Grade	4 Gangs	3 1/2" [89mm]		3/4" – 2"		USA	
RFB6	Yes	Yes	Above Grade	6 Gangs	3 1/4" [83mm]		3/4" – 1 1/4"	FloorPort	USA	
RFB6-OG	Yes	Yes	On-Grade	6 Gangs	3 1/4" [83mm]		3/4" – 1 1/4"	FloorPort	USA	
RFB6E	Yes	Yes	Above Grade	6 Gangs	3 1/4" [83mm]		3/4" – 1 1/4"	Evolution 8CT & 8CTC Series	USA	
RFB6E-OG	Yes	Yes	On-Grade	6 Gangs	3 1/4" [83mm]		3/4" – 1 1/4"		USA	

NOTE: Pricing may vary depending on country of origin. Consult your local sales representative for more information.


## RFB2 Series Multiservice Steel Recessed Floor Box Ordering Information

Catalog No./Item	Description/Specifications
<b>RFB2</b>  Country of Origin: USA	<b>Two-Compartment Box – For use in either concrete or wood floors.</b> Fully adjustable with tunnel compartment. Supplied with one (1) duplex receptacle mounting plate, and one (1) communication mounting plate (RFB22AB). Other device plates sold separately.
<b>RFB2-SS</b>  Country of Origin: USA	<b>Two-Compartment Shallow Stamped Steel Floor Box – For use in either concrete or wood floors.</b> Fully adjustable with tunnel compartment. Supplied with one (1) duplex receptacle mounting plate, and one (1) communication mounting plate (RFB22AB). Other device plates sold separately.
<b>RFB2-OG</b>  Country of Origin: USA	<b>Two-Compartment Box – For use On Grade.</b> Fully adjustable with tunnel compartment. Supplied with one (1) duplex receptacle mounting plate, and one (1) communication mounting plate (RFB22AB). Other device plates sold separately.  <b>NOTE:</b> RFB2-OG for on-grade applications is painted with a fusion-bonded epoxy designed for use on metal reinforcement bar and related accessories before encapsulating in concrete.

## RFB2 Series Floor Boxes Compartment Capacities/ Knockout Locations & Sizes


### RFB2 & RFB2-OG

**Power or Data**  
50.2 cu. in. [822.6 ml]  
Each Side  
**Top View**


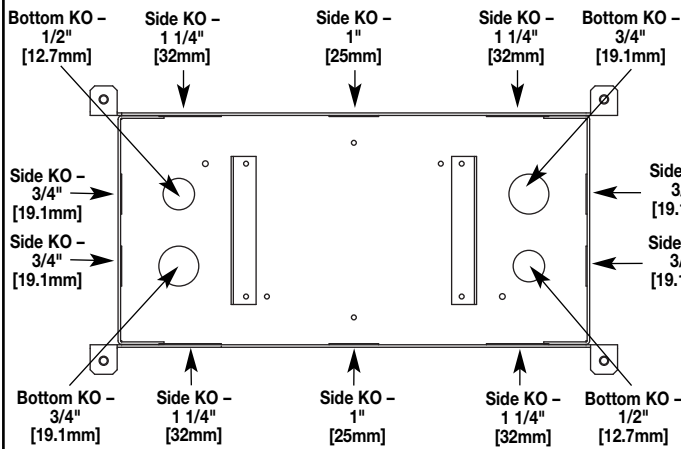





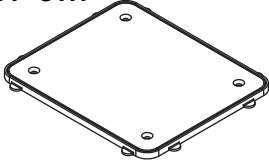



### RFB2-SS

**Power or Data**  
38.0 cu. in. [622.7 ml]  
Each Side  
**Top View**

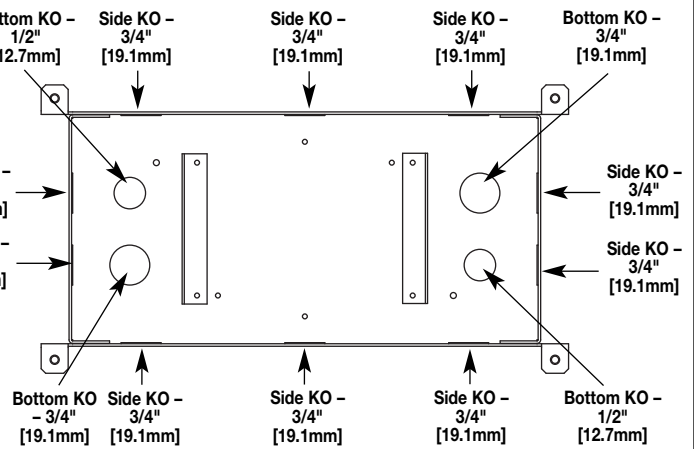

## RFB2 Series Multiservice Steel Recessed Floor Box Accessories

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
<b>RFB2DP</b>  <b>Internal Duplex Receptacle Bracket</b> – Accepts standard 15 Amp & 20 Amp Duplex Receptacles. <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>	<b>RFB2EXT</b>  <b>Internal Audio/Video Bracket</b> – Accepts two (2) Legrand AVIP or Extron® Electronics MAAP Series devices (sold separately). <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>		
<b>RFB2B</b>  <b>Internal Blank Bracket</b> – Plate used to close off unused gangs. <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>	<b>RFB2-AAP</b>  <b>Internal Audio/Video Bracket</b> – Accepts Two (2) Extron® Electronics AAP Series devices (sold separately). <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>		
<b>RFB2GFI</b>  <b>Internal GFI or Decorator Style Receptacle Bracket</b> – Accepts standard GFCI or Decorator Style Receptacles, Communication or Audio/Video Devices. <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>	<b>RFBKIT</b>  <b>Barrier Kit</b> – Barrier kit used to separate power and communication wires in partition feed covers. Supplied with base and three extensions to adjust to cover height. Kit should be used on RFB2, RFB2-OG, RFB2-SS, RFB4 and RFB4-SS Floor Boxes. Kits are sold separately. <b>Country of Origin: USA</b>		
<b>RFB22AB</b>  <b>Internal Communication Bracket</b> – Includes two (2) adapters to accept Wiremold CM2 Series Open System communication inserts (sold separately). <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>	<b>FP-CTR</b>  <b>Bare Concrete &amp; Terrazzo Ring</b> – Nonmetallic ring for use on bare polished concrete and terrazzo floor applications. <b>Country of Origin: USA</b>		
<b>RFB2RT</b>  <b>Internal Communication Bracket</b> – Includes Two (2) adapters to accept Ortronics® TracJack devices, and Two (2) adapters to accept Ortronics® Series II devices (sold separately). <b>Country of Origin: USA</b> <b>NOTE: For RFB2 Series Floor Boxes only.</b>	<b>NOTE: All device plates and accessories shown on this page are made in the United States of America.</b>		