


## Combination AC Disconnect / 20 Amp GFCI Receptacle—Together in 1 Box

SECTION A

AC DISCONNECTS

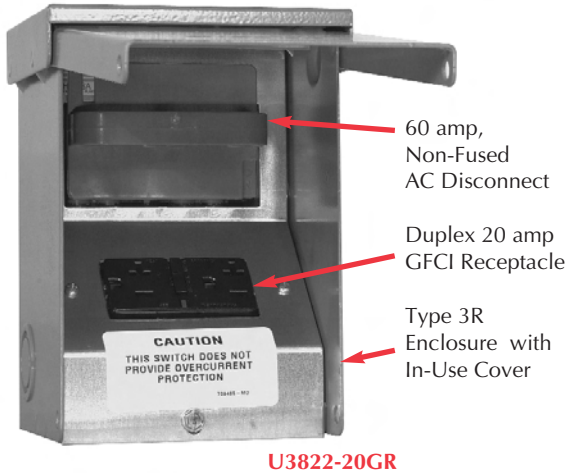

**U3822-20GR**

- Meets NEC # 210.63 Requirements \*
- UL Listed as Power Outlet
- Type 3R Enclosure
- In-Use Cover\*\*
- Duplex Ground Connector
- 1" Concentric Knockouts

**AC DISCONNECT**

- 1Ø, 240 Volt
- 60 amp, Non-Fused

**GFCI RECEPTACLE**

- 20 amp
- Reset/Test Button
- Padlock provision

\* NEC® #210.63 Heating, Air-Conditioning and Refrigeration Equipment Outlet. ...The receptacle shall be located on the same level and within 7.5 m (25 ft.) of the heating, air-conditioning and refrigeration equipment.  
 \* NEC® #210.08 Ground-Fault Circuit- Interruptor protection for personnel.

AMP	TYPE	CATALOG NUMBER	MAX H.P.	WT. #	LINE & LOAD CONNECTOR WIRE RANGE		GROUND CONNECTOR WIRE RANGE	DIMENSIONS			WIRE RATING	
					CU	AL	CU/AL	D"	W"	H"	CU °C	AL °C
60	NONFUSIBLE	U3822-20GR	10	6	#14-#2	#12-#2	#14-4	4.8	5.25	7.4	60°/75°	60°/75°

To ensure the safest conditions, Milbank disconnect pullers are designed to be reversible so they may be reinstalled in the OFF position. All units are designed with a padlock provision on the cover for security.

**\*\*Note: U3822-20GR** cover rated as *IN-USE COVER* (Cover may be closed with cords plugged into receptacle).

\*Reprinted with permission from NFPA 70-2002, *National Electrical Code*®, Copyright 2001, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the NFPA on the referenced subject, which is represented only by the standard in its entirety. National Electrical Code® and NEC® are registered trademarks of the National Fire Protection Association, Quincy, MA.

## Hot Tub Disconnect or Sub Panel Breaker Enclosure—Type 3R

### Spa Box with GFCI Protection



U4881-O-50GB

- 240 volt ground fault protection
- UL listed, Type 3R rainproof
- Milbank reliability
- Easy installation
- 2 pole, 50 amp GFCI breaker protection
- Compact size:  
8-1/2" H x 7-1/2" W x 3-3/4" D
- 3 or 4 wire installation
- 1Ø, 120 / 240 VAC
- Standard package of 12
- 2 extra one-pole breaker spaces
- 100 amp overall rating

### Sub Panel Breaker Enclosure

- Use as a 100 amp, 4 circuit sub panel enclosure



AMP	TYPE	CATALOG NUMBER	WT. #	LINE & LOAD CONNECTOR WIRE RANGE		GROUND CONNECTOR WIRE RANGE	DIMENSIONS		
				CU	AL	CU/AL	D"	W"	H"
50	BREAKER	U4881-O-50GB	8	#14-1/0	#14-1/0	#14-1/0	3 3/4	7 1/2	8 1/2
60	BREAKER	U4881-O-60GB	8	#14-1/0	#14-1/0	#14-1/0	3 3/4	7 1/2	8 1/2

