

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index




## Fork Terminal, Nylon Insulated

### Type PN-F

- Fork design provides for fast and easy installation, without the need to remove fastener
- Metal insulation grip sleeve crimps to wire insulation, providing protection to the crimp joint during high vibration applications

- Internal barrel serrations assure good wire contact and maximum tensile strength
- UL Flammability UL 94V-2/HB, maximum insulation temperature 221°F (105°C)
- UL and CSA rated up to 600 V per UL 486A/B

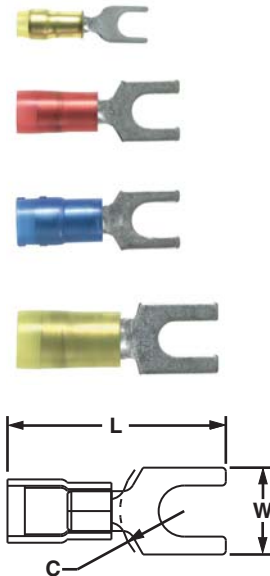

Part Number	Wire Range	Color Code	Stock Thickness (In.)	Max. Ins. (In.)	Stud Size	Figure Dimensions (In.)			Recommended Installation Tool	Std. Pkg. Qty.**	Std. Ctn. Qty.
						L	W	C			
<b>PN22-2F-C*</b>	26 – 22 AWG	Yellow	0.02	0.090	#2	0.66	0.20	0.19	CT-600-A, CT-1525, CT-2500	100	1000
<b>PN22-4F-C*</b>			0.02	0.090	#4	0.67	0.20	0.21			
<b>PN22-6F-C*</b>			0.02	0.090	#6	0.77	0.25	0.26			
<b>PN18-6FN-C*</b>	22 – 18 AWG	Red	0.03	0.145	#6	0.78	0.24	0.20	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
<b>PN18-6F-C</b>			0.03	0.145	#6	0.78	0.30	0.20			
<b>PN18-8F-C</b>			0.03	0.145	#8	0.85	0.32	0.23			
<b>PN18-10FN-C*</b>			0.03	0.145	#10	0.86	0.31	0.25			
<b>PN18-10F-C</b>			0.03	0.145	#10	0.86	0.35	0.25			
<b>PN18-14F-C</b>			0.03	0.145	1/4"	1.03	0.44	0.33			
<b>PN14-6FN-C*</b>	18 – 14 AWG	Blue	0.03	0.162	#6	0.79	0.24	0.19	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
<b>PN14-6F-C</b>			0.03	0.162	#6	0.79	0.28	0.19			
<b>PN14-8F-C</b>			0.03	0.162	#8	0.85	0.31	0.23			
<b>PN14-10FN-C*</b>			0.03	0.162	#10	0.87	0.31	0.24			
<b>PN14-10F-C</b>			0.03	0.162	#10	0.87	0.34	0.24			
<b>PN14-14F-C</b>			0.03	0.162	1/4"	1.02	0.44	0.32			
<b>PN10-6F-L</b>	12 – 10 AWG	Yellow	0.04	0.225	#6	1.00	0.31	0.22	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	50	500
<b>PN10-8F-L</b>			0.04	0.225	#8	1.03	0.37	0.22			
<b>PN10-10F-L</b>			0.04	0.225	#10	1.04	0.37	0.22			
<b>PN10-14F-L</b>			0.04	0.225	1/4"	1.14	0.49	0.30			

\*Not UL Listed or CSA Certified.

\*\*Bulk packaging may be available, contact Panduit Customer Service for additional information.

‡UL and CSA approved tooling/product combinations. For crimping tool information, see pages D1.83, D1.84, D1.86 and D1.88.




## Fork Terminal, Nylon Insulated – Funnel Entry

### Type PNF-F

- Fork design provides for fast and easy installation, without the need to remove fastener
- Metal insulation grip sleeve crimps to wire insulation, providing protection to the crimp joint during high vibration applications

- Internal barrel serrations assure good wire contact and maximum tensile strength
- UL Flammability UL 94V-2/HB, maximum insulation temperature 221°F (105°C)
- UL and CSA rated up to 600 V per UL 486A/B

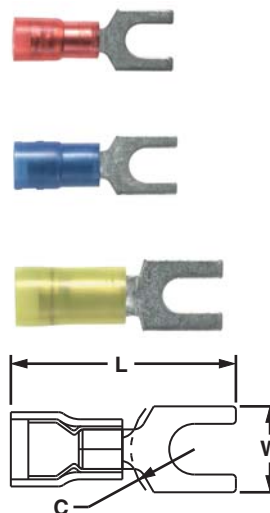

Part Number	Wire Range	Color Code	Stock Thickness (In.)	Max. Ins. (In.)	Stud Size	Figure Dimensions (In.)			Recommended Installation Tool	Std. Pkg. Qty.**	Std. Ctn. Qty.
						L	W	C			
<b>PNF18-6F-C</b>	22 – 18 AWG	Red	0.03	0.136	#6	0.80	0.30	0.22	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
<b>PNF18-8F-C</b>			0.03	0.136	#8	0.86	0.31	0.25			
<b>PNF18-10F-C</b>			0.03	0.136	#10	0.87	0.34	0.26			
<b>PNF18-14F-C</b>			0.03	0.136	1/4"	1.05	0.44	0.35			
<b>PNF14-6F-C</b>	16 – 14 AWG	Blue	0.03	0.162	#6	0.80	0.28	0.22	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	100	500
<b>PNF14-8F-C</b>			0.03	0.162	#8	0.85	0.31	0.25			
<b>PNF14-10F-C</b>			0.03	0.162	#10	0.87	0.34	0.26			
<b>PNF14-14F-C</b>			0.03	0.162	1/4"	1.05	0.44	0.35			
<b>PNF10-6F-L</b>	12 – 10 AWG	Yellow	0.04	0.225	#6	1.01	0.31	0.24	CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡	50	500
<b>PNF10-8F-L</b>			0.04	0.225	#8	1.02	0.37	0.24			
<b>PNF10-10F-L</b>			0.04	0.225	#10	1.04	0.37	0.24			
<b>PNF10-14F-L</b>			0.04	0.225	1/4"	1.15	0.50	0.31			

\*\*Bulk packaging may be available, contact Panduit Customer Service for additional information.

‡UL and CSA approved tooling/product combinations. For crimping tool information, see pages D1.83, D1.84, D1.86 and D1.88.

# PANDUIT® ELECTRICAL SOLUTIONS

A. System Overview	Part Number	Page Number	Part Number	Page Number	Part Number	Page Number
B1. Cable Ties	PNF10-56R-2K	D1.104	PNF18-4RN-3K	D1.104	<b>PPS0710G001</b>	<b>E5.25</b>
	PNF10-56R-L	D1.7	PNF18-56R-C	D1.7	<b>PPS0710G020</b>	<b>E5.25</b>
	PNF10-6F-2K	D1.108	PNF18-5SLF-3K	D1.112	PPS0710N203	E5.24
	PNF10-6F-L	D1.22	PNF18-5SLF-C	D1.27	PPS0710N443	E5.39
	PNF10-6LF-2K	D1.110	PNF18-6F-3K	D1.108	PPS1007D72SE	E5.24
B2. Cable Accessories	PNF10-6LF-L	D1.25	PNF18-6F-C	D1.22	PPS1014BWHT	E5.39
	PNF10-6R-2K	D1.104	PNF18-6FF-3K	D1.114	PPS1014BYEL	E5.39
	PNF10-6R-L	D1.7	PNF18-6FN-3K	D1.108	PPS1014C442	E5.39
	PNF10-6SLF-2K	D1.112	PNF18-6LF-3K	D1.110	PPS1014D440	E5.39
	PNF10-6SLF-L	D1.27	PNF18-6LF-C	D1.25	PPS1014D73	E5.34
B3. Stainless Steel Ties	PNF10-8F-2K	D1.108	PNF18-6LFW-3K	D1.110	<b>PPS1014G002</b>	<b>E5.23, E5.25</b>
	PNF10-8F-L	D1.22	PNF18-6LFW-C	D1.25	PPS1014N443	E5.39
	PNF10-8FF-2K	D1.114	PNF18-6R-3K	D1.104	<b>PPS1209G010</b>	<b>E5.23, E5.25</b>
	PNF10-8LF-2K	D1.110	PNF18-6R-C	D1.7	<b>PPS1209G011</b>	<b>E5.23, E5.25</b>
	PNF10-8LF-L	D1.25	PNF18-6RN-3K	D1.104	<b>PPS1209G012</b>	<b>E5.23, E5.25</b>
C1. Wiring Duct	PNF10-8R-2K	D1.104	PNF18-6RN-C	D1.7	PPS1420BWHT	E5.39
	PNF10-8R-L	D1.7	PNF18-6SLF-3K	D1.112	PPS1420BYEL	E5.39
	PNF10-8SLF-2K	D1.112	PNF18-6SLF-C	D1.27	PPS1420C442	E5.39
	PNF10-8SLF-L	D1.27	PNF18-8F-3K	D1.108	PPS1420D440	E5.39
	PNF14-10F-3K	D1.108	PNF18-8F-C	D1.22	PPS1420N443	E5.39
C2. Surface Raceway	PNF14-10F-C	D1.22	PNF18-8FF-3K	D1.114	PPTMT	B3.16
	PNF14-10FF-3K	D1.114	PNF18-8LF-3K	D1.110	PRA2S-A-Q	B2.8
	PNF14-10LF-3K	D1.110	PNF18-8LF-C	D1.25	PRL100BY-0 thru PRL100BY-9	E5.38
	PNF14-10LF-C	D1.25	PNF18-8R-3K	D1.104	PRL100BY-18KIT	E5.38
	PNF14-10LFN-3K	D1.110	PNF18-8R-C	D1.7	PRL100BY-36KIT	E5.38
C3. Abrasion Protection	PNF14-10R-3K	D1.104	PNF18-8SLF-3K	D1.112	PRL100BY-A thru PRL100BY-Z	E5.38
	PNF14-10R-C	D1.7	PNF18-8SLF-C	D1.27	PRL100BY-BLNK	E5.38
	PNF14-10R-3K	D1.104	PNL-1000-2-3	D2.131	PRL100BY-DSH	E5.38
	PNF14-10SLF-3K	D1.112	PNL-1000-3	D2.129	PRL150YB-0 thru PRL150YB-9	E5.38
	PNF14-10SLF-C	D1.27	PNL-1/0-L	D2.129	PRL150YB-A thru PRL150YB-Z	E5.38
C4. Cable Management	PNF14-14F-3K	D1.108	PNL-1/0-2-L	D2.131	PRL150YB-DSH	E5.38
	PNF14-14F-C	D1.22	PNL-250-2-Q	D2.131	PRL250YB-0 thru PRL250YB-9	E5.38
	PNF14-14R-3K	D1.104	PNL-250-Q	D2.129	PRL250YB-A thru PRL250YB-Z	E5.38
	PNF14-14R-C	D1.7	PNL-4-C	D2.129	PRL250YB-DSH	E5.38
	PNF14-14SLF-C	D1.27	PNL-500-2-3	D2.131	PRLW30S-D30	B1.32
D1. Terminals	PNF14-38R-L	D1.7	PNL-500-3	D2.129	PRLW50S-D30	B1.32
	PNF14-4R-3K	D1.104	PNLC-1/0-3	D2.135	PROG-CCCD	E1.16
	PNF14-4R-C	D1.7	PNLC-250-1	D2.135	PROG-EM2GO	E1.16
	PNF14-56R-C	D1.7	PNLC-500-1	D2.135	PROG-EMCD3	E1.16
	PNF14-5SLF-C	D1.27	PP1S-S10-X	B2.23	PRS0710B364	E5.19, E5.24
D2. Power Connectors	PNF14-6F-3K	D1.108	PP1S-S12-X	B2.23	PRS0710BWHT	E5.39
	PNF14-6F-C	D1.22	PP2S-S10-X	B2.23	PRS0710BYEL	E5.39
	PNF14-6FF-3K	D1.114	PP2S-S12-X	B2.23	PRS0710C442	E5.39
	PNF14-6FN-3K	D1.108	PP5X50F	B1.83	PRS0710D440	E5.39
	PNF14-6LF-3K	D1.110	PPC25X50	B1.83	PRS0710D68	E5.24
D3. Grounding Connectors	PNF14-6LF-C	D1.25	PPC25X50F	B1.83	PRS0710D72	E5.19, E5.24
	PNF14-6LFW-C	D1.25	PPF2S-S25-V	B2.24, C4.14	PRS0710N443	E5.39
	PNF14-6R-3K	D1.104	PPF2S-S25-V69	B2.24, C4.14	PRS0910D453	E5.24
	PNF14-6R-C	D1.7	PPF2SV-S25-V	B2.24, C4.14	PRS1014B364	E5.19, E5.24
	PNF14-6RN-3K	D1.104	PPF2SV-S25-V69	B2.24, C4.14	PRS1014BWHT	E5.39
E1. Labeling Systems	PNF14-6RN-C	D1.7	PPH10	B1.113, B3.16	PRS1014BYEL	E5.39
	PNF14-6SLF-3K	D1.112	PPM-0 thru PPM-25	E3.8	PRS1014C442	E5.39
	PNF14-6SLF-C	D1.27	PPM-1-33	E3.8	PRS1014D440	E5.39
	PNF14-8F-3K	D1.108	PPM-A thru PPM-C	E3.8	PRS1014D70	E5.24
	PNF14-8F-C	D1.22	PPMV1-4RB-3K	D1.118	PRS1014D71	E5.24
E2. Labels	PNF14-8FF-3K	D1.114	PPS0202B493	E5.19	PRS1014D72	E5.19, E5.24
	PNF14-8LF-3K	D1.110	PPS0305C174	E5.19, E5.24	PRS1014D73	E5.24
	PNF14-8LF-C	D1.25	PPS0305D73	E5.24	PRS1014D79	E5.24
	PNF14-8R-3K	D1.104	PPS0305D75	E5.24	PRS1014N443	E5.39
	PNF14-8R-C	D1.7	<b>PPS0305W2200</b>	<b>E5.23</b>	PRS1420BWHT	E5.39
E3. Pre-Printed & Write-On Markers	PNF14-8SLF-C	D1.27	<b>PPS0507W2200</b>	<b>E5.23</b>	PRS1420BYEL	E5.39
	PNF18-10F-3K	D1.108	PPS0514B363	E5.24	PRS1420C442	E5.39
	PNF18-10F-C	D1.22	PPS0710B364	E5.19, E5.24	PRS1420D440	E5.39
	PNF18-10FF-3K	D1.114	PPS0710BWHT	E5.39	PRS1420D75	E5.24
	PNF18-10LF-3K	D1.110	PPS0710BYEL	E5.39	PRS1420N443	E5.39
E4. Permanent Identification	PNF18-10LF-C	D1.25	PPS0710C141	E5.24	PRST30S-S14-M30	B1.75
	PNF18-10R-3K	D1.104	PPS0710C442	E5.39	PRST40SC-D30	B1.74
	PNF18-10R-C	D1.7	PPS0710D101	E5.24	PRT1.5S-C	B1.22
	PNF18-10SLF-3K	D1.112	PPS0710D24	E5.24	PRT1.5S-C0	B1.23
	PNF18-10SLF-C	D1.27	PPS0710D28	E5.24	PRT1.5S-M30	B1.23
E5. Lockout/Tagout & Safety Solutions	PNF18-14F-3K	D1.108	PPS0710D440	E5.19	PRT10EH-C	B1.22
	PNF18-14F-C	D1.22	PPS0710D66	E5.24	PRT10EH-Q0	B1.24
	PNF18-14R-3K	D1.104	PPS0710D70	E5.24	PRT12EH-C	B1.22
	PNF18-14R-C	D1.7	PPS0710D72	E5.19, E5.24	PRT12EH-Q0	B1.24
	PNF18-38R-C	D1.7	PPS0710D73	E5.24	PRT1S-C	B1.22
F. Index	PNF18-4R-3K	D1.104	PPS0710D75	E5.24	PRT1S-C0	B1.23
	PNF18-4R-C	D1.7	PPS0710D77	E5.24	PRT2EH-C	B1.22