



Power Supply Specifications, Dimensions & Selection



WIRING DIAGRAMS

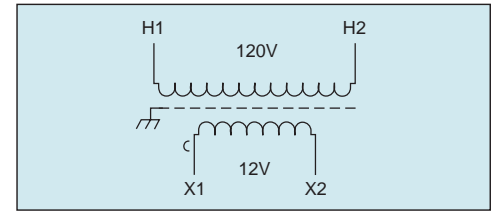

12V Units

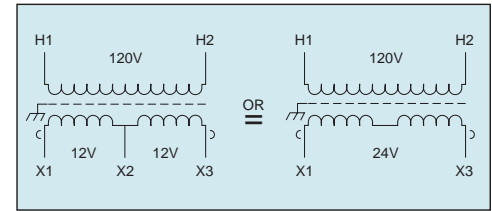

12/24 V Units

SELECTION GUIDE

GROUP II

WITH LOW VOLTAGE CIRCUIT BREAKERS ③



WITHOUT LINE CORD				WITH LINE CORD			Approx. Ship Weight Lbs. (Kg.)
Watts	120 Volt Input 12 Volt Output UL-506 Listed	120 Volt Input 12/24 Volt Output ④ UL-506 Listed	120 Volt Input 12 Volt Output UL-1012 Listed	Approx. Dimensions ⑤ Inches (Cm.)			
	Catalog No.	Catalog No.	Catalog No.	Height	Width	Depth	
100	TLV-10012-S ①	TLV-10024-S ①	TLV-10012-SC ①	13.00 (33.0)	3.91 (9.9)	3.98 (10.1)	9 (4.1)
150	TLV-15012-S ①	TLV-15024-S ①	TLV-15012-SC ①	13.00 (33.0)	3.91 (9.9)	3.98 (10.1)	9 (4.1)
250	TLV-25012-S ①	TLV-25024-S ①	TLV-25012-SC ①	13.00 (33.0)	3.91 (9.9)	3.98 (10.1)	12 (5.4)
500	TLV-50012-S ②	TLV-50024-S ①	TLV-50012-SC ②	14.00 (35.6)	4.66 (11.8)	4.60 (11.7)	17 (7.7)
750	TLV-75012-S ②	TLV-75024-S ①	--	14.00 (35.6)	4.66 (11.8)	4.60 (11.7)	20 (9.1)
1000	TLV-100012-S ②	TLV-100024-S ②	--	15.35 (39.0)	5.41 (13.7)	5.23 (13.3)	28 (12.7)
1500	--	TLV-150024-S ②	--	15.35 (39.0)	5.41 (13.7)	5.23 (13.3)	35 (15.9)

GROUP III

WITHOUT LOW VOLTAGE CIRCUIT BREAKERS



WITHOUT LINE CORD			WITH LINE CORD			Approx. Ship Weight Lbs. (Kg.)
Watts	120 Volt Input 12 Volt Output UL-506 Listed	120 Volt Input 12/24 Volt Output ④ UL-506 Listed	Approx. Dimensions ⑤ Inches (Cm.)			
	Catalog No.	Catalog No.	Height	Width	Depth	
100	T-10012-S	T-10024-S	13.00 (33.0)	3.91 (9.9)	3.98 (10.1)	9 (4.1)
150	T-15012-S	T-15024-S	13.00 (33.0)	3.91 (9.9)	3.98 (10.1)	9 (4.1)
250	T-25012-S	T-25024-S	13.00 (33.0)	3.91 (9.9)	3.98 (10.1)	12 (5.4)
500	T-50012-S	T-50024-S	14.00 (35.6)	4.66 (11.8)	4.60 (11.7)	17 (7.7)
750	T-75012-S	T-75024-S	14.00 (35.6)	4.66 (11.8)	4.60 (11.7)	20 (9.1)
1000	T-100012-S	T-100024-S	15.35 (39.0)	5.41 (13.7)	5.23 (13.3)	28 (12.7)
1500	--	T-150024-S	15.35 (39.0)	5.41 (13.7)	5.23 (13.3)	35 (15.9)

① Push to reset Thermal Breaker.

② Magnetic Breaker Toggle On/Off.

③ Low voltage circuit breakers are for protection only and are not to be used as an on/off switch for 100 and 150 watt 12 volt units or on 100, 150 and 250 watt 12/24 volt units.

④ 12/24 volt output denotes a three-wire circuit, one 24 volt output or two 12 volt outputs. Each 12 volt output is rated at 1/2 nameplate wattage.

⑤ Dimensions not for construction purposes. Contact factory for certified drawings.