

# HALO

## INSTALLATION INSTRUCTIONS FOR ATTACHING BARNDOOR L-1967 TO L-3704, L-3703, L-3705 (CLIPS INCLUDED), L-4007 (USING LCS-4007 CLIP SET), & L-4008 (USING LCS-4008 CLIP SET)

**Step 1:** Allow fixture to cool, remove from track, remove lamp from gimbal.

**Step 2:** Position clips (supplied with fixture) apart and snap into the slots provided in the gimbal ring.

**FOR L-4007 OR L-4008 ONLY**

Position 2 clips 90° apart and snap between wires. (Clips not included with fixture.)

**Step 3:** Push barndoor into position on clips.

**FOR L-4007 OR L-4008 ONLY**

Put barndoor into position on the 2 clips now add the other 2 clips.


**NOTE:** L-4008 lamp must be installed before barndoors.

**Step 4:** If optional filter, lens or baffle is being used, install in front of barndoor as shown.

**FOR L-3703, L-3704 & L-3705**

**Step 5:** Place lamp back in gimbal ring

**Step 6:** Attach barndoor and fixture assembly to Power-Trac or appropriate adapter and bend barndoor to the desired position.

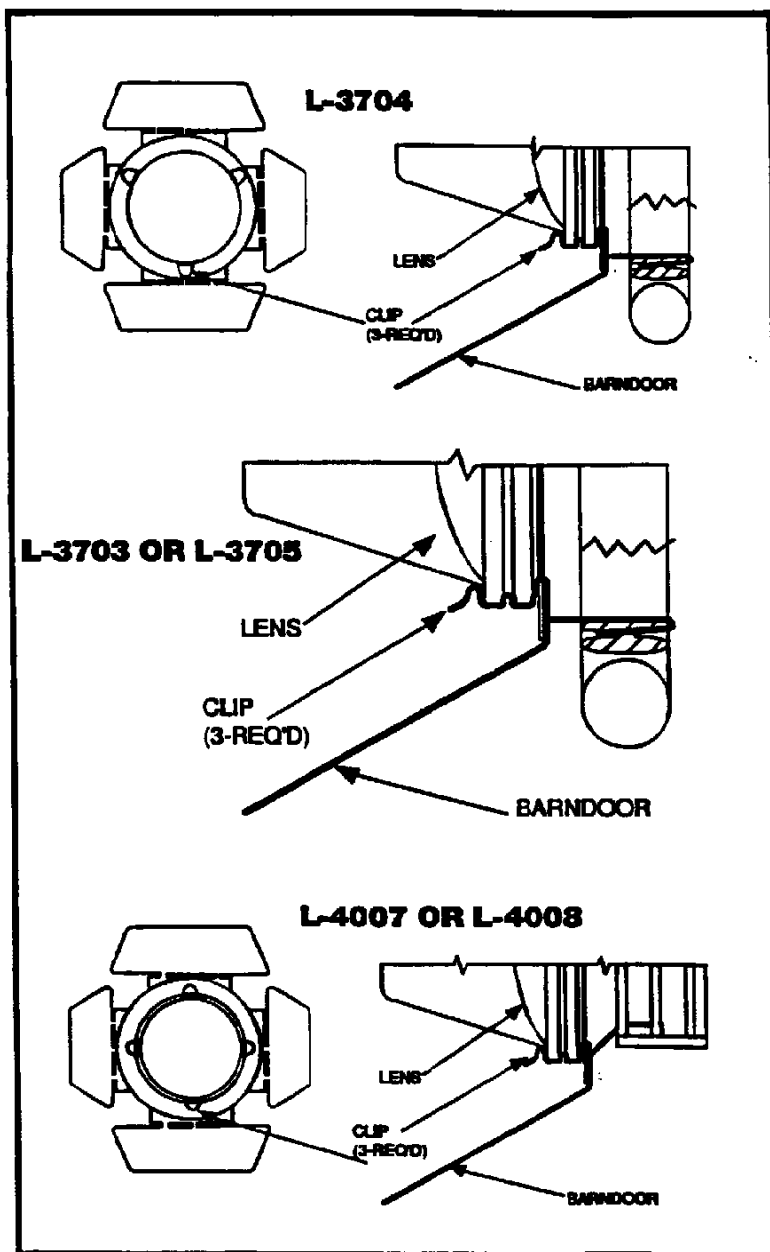

## RELAMPING INSTRUCTIONS FOR L-4007 & L-4008 WITH BARDOORS

**WARNING:** Before working on Power-Trac fixture, be sure to turn off AC power or remove fixture from track.

**Step 1:** Allow fixture to cool and then remove from track.

**Step 2:** Remove louver and filter if being used. Then remove 2 clips and barndoor as shown. **NOTE:** Step 2 is omitted with relamping L-4007.

**Step 3:** Turn lamp counter-clockwise and remove it from socket thru the cage as shown.

**Step 4:** Refer to relamping label on fixture for proper lamp replacement.

**Step 5:** Place lamp back in socket and replace clips, barndoor, filter and louver if used.

